# American Hose & Rubber Co. Inc. **PRODUCT CATEGORIES**







American Hose & Rubber Co. Inc.

# WWW.AMHOSE.COM

## **PIPE FITTINGS**



Pipe Size	1/16	1/8	1/4	3/8	1/2	3/4	1
Thread Size	1/16-27	1/8-27	1/4-18	3/8-18	1/2-14	3/4-14	1-11 <sup>1/2</sup>
Working Pressure	1200	1200	1200	1200	1200	1000	1000
Thread OD	1/4	3/8	1/2	5/8	3/4	1	1-1/4

**Typical Application**: Grease, fuels, LP and Natural gas (available on special order), refrigeration, instrumentation and hydraulic systems.

**Pressure**: Operating pressure up to 1200 PSI. **Vibration**: Fair resistance. **Temperature Range**: -65°F to +250°F (-53°C to +121°C).

**Used With:** Brass, bronze, copper, steel, aluminum and iron pipe.

**Tolerance** : +/- .02 on all dimensions. Dimension Data can change without notice. Please call us when dimensions are critical.

**Conformance**: Meets specifications and standards of ASA, ASME and SAE

Not lead free

"L" at the end of a Part# means Light Pattern

- these fittings are completely interchangeable with full pattern fittings, but have been modified in some way. This modification is usually in the length of the pipe threads. Used in plumbing and light industrial applications.


#### Assembly Instructions


1 - Tighten approximately 2-1/2 turns past hand tight.
2 - Fittings with Everseal tighten two turns past hand tight. Brittle materials require special cautions.

- see page 547-550 for stainless steel
- see page 313 for steel fittings
- see page 295-297 for plastic pipe fittings.



 Lead Free Fittings see pages 157-160
 For Bronze & Larger Sizes



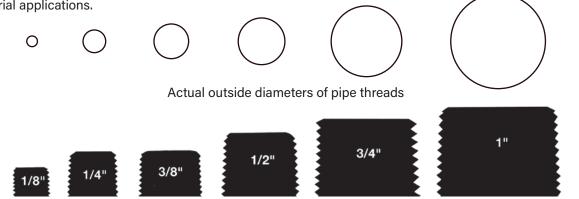

Actual Male Thread Profiles

#### HOSE BARB BRASS FITTINGS

# **HOSE BARB FITTINGS**



#### • **Temperature and Working Pressure Ranges** From -40°F to + 160°F at 150 PSI maximum.

#### Tolerance

+/- .02 on all dimensions. Dimension Data can change without notice. Please call us when dimensions are critical.

**Note:** These fittings are intended for use with hose clamp, similar type clamp or a crimped ferrule.


#### Assembly Instructions

1- Cut hose cleanly and squarely to length.

2- Slide clamp on hose.

**3-** Lubricate hose. Push hose on fitting until hose bottoms against stop ring or hex.

**4-** Position hose clamp as shown below and secure with a screwdriver or wrench. Maintain "A" dimension noted below for proper clamp positioning.





 For Lead Free AB1953 Compliant Fittings see pages 161
 Other Barbs available
 See page 334-347 for plastic hose barb fittings

See page 27-28 for stainless steel hose barbs



See page 358 for King Nipples

Stainless Steel hose barbs for beverage service available -

See beverage fitting section, pg. 28-29

Hose Size	Α
3/16"	1/4"
1/4"	1/4"
5/16"	1/4"
3/8"	1/8"
1/2"	1/8"
5/8"	1/8"
3/4"	1/8"

#### Actual Profile of Hose Barbs 1/2 3/8" 5/16" 1/4" 3/16" 1/8" 3/4" 1" 5/8' .645 .79 1.02 .165 .227 .29 .354 .415 .53

#### PUSH ON HOSE BARB BRASS FITTINGS

# **PUSH ON BARB FITTINGS**



**Typical Application:** Low Pressure Air, Fuel, Lube, and Oil Lines

 Pressure determined by tube material and hardness. Our parts have been tested to max 150 PSI.
 Advantages: Easy assembly. No clamps needed!!

#### • Assembly Instructions 1- Lubricate insert.

**2-** Hold hose at angle as shown & push on and up over first barb.


**3-** Continue to push straight on until hose is seated under protective plastic cap. Keep hands back from hose end area so that hose can expand.

#### Disassembling Instructions

Split hose. Do not cut completely through hose.
 Sealing edge of barb could be damaged.
 Bend hose and remove with a quick pull.

See lead free section for lead free push-on barb fittings. Stainless steel available at the end of this section.





WARNING: This product can expose you to chemicals, including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, visit www.P65Warnings.ca.gov

€

#### GARDEN HOSE BRASS FITTINGS

# **GARDEN HOSE FITTINGS**



#### Temperature and Working Pressure Ranges

From  $+35^{\circ}$ F to  $+100^{\circ}$ F at 75 PSI maximum or the recommended working pressure of the garden hose. (Not to exceed 150 PSI.)

**Note:** All female connector ends should have a rubber washer inserted prior to usage.

**FGH** = Female Garden Hose threads **MGH** = Male Garden Hose threads Male garden hose threads are all 3/4" with an outside diameter of 1.0625 and 11-1/2" threads per inch.



#### Male Garden Hose Profile




See Plastic section for Plastic Garden Hose Fittings



See page 162 for lead free Garden Hose

Washers included are #30150B black rubber washers.

# Actual Profile of Garden Hose Barbs

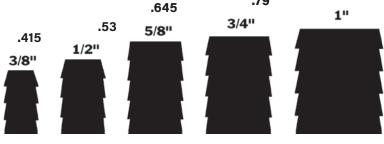

37

#### SAE 45° FLARE **BRASS FITTINGS**

## SAE 45° FLARE



Tube O.D.	1/8	3/16	1/4	5/16	3/8	7/16	1/2	5/8	3/4
Thread Size-B	5/16-24	3/8-24	7/16-20	1/2-20	5/8-18	11/16-16	3/4-16	7/8-14	1-1/16-14

#### Typical Application

LP and natural gas, flammable liquids, instrumentation, refrigeration, power steering, hydraulic and pneumatic systems.

#### Working Pressure Ranges

Temperature and type of tubing used are important factors. However, the following table is a good guide for proper selection. Temperature 73°F with copper tubing:

PSI	Tube O.D. (in.)	Tube Wall (in.)
2800	1/8	.030
1900	3/16	.030
1400	1/4	.030
1200	5/16	.032
1000	3/8	.032
750	1/2	.032
650	5/8	.035
550	3/4	.035
450	7/8	.035

#### Vibration

Good resistance - use long nut when greater vibration resistance is required.

#### Temperature Range

-65°F to +250°F (-53°C to +121°C) range at maximum operating pressures.

#### Used With

Copper, brass, aluminum and steel hydraulic tubing that can be flared.

Actual O.D. of Flare Fittings

#### Tolerance

+/-.03 on all dimensions. Dimension data can change without notice. Please call us when dimensions are critical.

#### Conformance

Meets specifications and standards of ASA, ASME, SAE and MS (Military standards).

#### **Assembly Instructions**

1- Cut tubing to desired length. Make sure all burrs are removed and ends are cut square.


2- Slide nut on tube. Threaded end "A" of nut must face out.

- 3- Flare end of tube with a 45° flaring tool.
- **a**-Measure flare diameter.
- b- Examine flare for excessive thin out.

4- Lubricate threads and assemble to fitting body. Nut should be turned hand tight.

**5-** Tighten assembly with wrench until a solid feeling is encountered. From that point, apply a one-sixth turn.

Note: Do not over-torgue as it may damage the fitting or split the tubing at the flare.

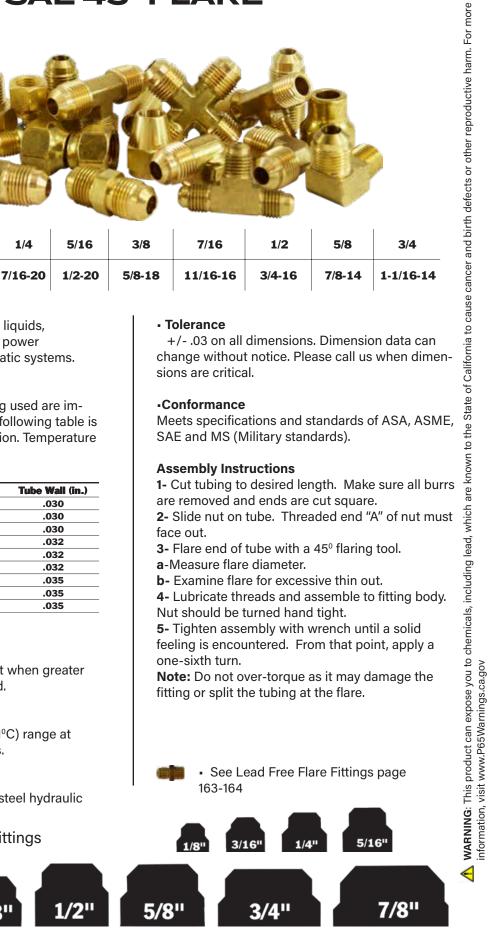

#### **INVERTED FLARE BRASS FITTINGS**

# **INVERTED FLARE FITTINGS**



	lube 0.D.	1/8	3/16	1/4	5/16	3/8	7/16	1/2	5/8	3/4	7/8	1
Thread O threads pe	).D. er inch	5/16-28	3/8-24	7/16-24	1/2-20	5/8-18	11/16-18	3/4-18	7/8-18	1-1/16-16	1-3/16-16	1-5/16-16

#### Typical Application

Hydraulic brake, power steering, fuel lines and transmission cooler lines, LP and natural gas.

#### Working Pressure Ranges

Temperature and type of tubing used are important factors. However, the following table is a

PSI	Tube O.D. (in.)	Tube Wall (in.)
2800	1/8	.030
1900	3/16	.030
1400	1/4	.030
1200	5/16	.032
1000	3/8	.032
750	1/2	.032
650	5/8	.035
550	3/4	.035

good guide for proper selection. Temperature 73°F with copper tubing: Vibration

Excellent resistance.

#### Temperature Range

-65°F to +250°F (-53°C to +121°C) range at maximum operating pressures.

#### •Used With

Copper, brass, aluminum and steel hydraulic tubing that can be flared.

#### Advantages

Very low cost and reusable. Seats and threads are internal and protected. Compact, excellent vibration life. Short nut affords very close tube bends. Steel or brass 20

1/8"	3/16"	1/4"	5/16"	3/8"
5/16"-28 2800 PSI		7/16"-24 1400 PSI	1/2"-20 1200 PSI	5/8"-18 1000 PSI
28				

tube nut.

#### Tolerance

+/- .03 on all dimensions.

#### Conformance

Meets specifications and standards of ASA, ASME, SAE and MS (Military Standards).

#### Assembly Instructions

1-Cut tubing to desired length. Make sure all burrs are removed and the ends are cut square.

2- Slide nut on tube. Threaded end "A" of nut must face out.

- 3- Flare end of tube with a 45° flaring tool.
- a- Measure flare diameter.
- **b-** Examine flare for excessive thin out.
- c- On thin wall, welded or brazed tubing, use double flare to prevent pinch-off and cracked flares. 4- Lubricate threads and assemble to fitting body. Nut should be turned hand tight.

#### STANDARD METRIC THREADS

#### Actual O.D. of male inverted flare threads

3/4"-18	7/8"-18	1-1/16"-16
750 PSI	650 PSI	550 PSI
1/2"	5/8"	3/4"

#### COMPRESSION BRASS FITTINGS

# **COMPRESSION FITTINGS**



These are NOT Lead Free See pages 164-166 for Lead Free products

Tube O.D.	1/8	3/16	1/4	5/16	3/8	7/16	1/2	5/8	3/4	7/8
Thread Size-B	5/16-24	3/8-24	7/16-24	1/2-24	9/16-24	5/8-24	11/16-20	13/16-18	1-18	1-1/8-18
Working Pressure	400	400	300	300	200	200	200	150	100	75

#### Typical Application

Use with copper, aluminum and thermoplastic tubing. Not recommended for steel tubing. Manufactured for low and medium pressure tubing connection work where excessive vibration or tube movement is not involved. Not recommended for application using gaseous media.

#### Pressure

See table above for working pressures at 73°F.

#### Vibration

Fair resistance - use long nut when greater vibration resistance is needed.

#### Temperature Range

-65°F to +250°F (-53°C to +121°C) range at maximum operating pressures. (Refer to tubing temperature range.)

#### Used With

Aluminum, copper, brass and plastic tubing. Plastic tubing requires insert. Not recommended for steel tubing.

#### Tolerance

+/- .02 on all dimensions. Dimension data can change without notice. Please call us when dimensions are critical.

#### Conformance

Meets specifications and standards of ASA, ASME and SAE.

#### Assembly Instructions

1- Cut tubing to desired length.

2- Slide nut and then sleeve on tube. Threaded end "A" of nut must face toward fitting.

3- Insert tubing into fitting body. Be sure tubing is

bottomed on fitting shoulder.

4- Lubricate threads and assemble nut to fitting body.

5- Tighten nut hand tight. From that point, tighten with a wrench the number of turns indicated in the chart below.

Tube Size	Additional Turns from Hand Tight
1/8" thru 1/4"	1-1/4"
5/16"	1-3/4"
3/8" thru 1"	2-1/4"

#### • "L" at the end of a Part# means Light Pattern -These fittings are completely interchangeable with full pattern fittings, but have been modified in some way. This modification is usually in the length of the pipe threads. Used in plumbing and light industrial applications.



**3RASS** 

#### FLARELESS BRASS FITTINGS

# **FLARELESS FITTINGS**

Flareless Brass Tube Fittings are Interchangeable with Poly-Flo<sup>®</sup>, Poly-Tite<sup>®</sup> and Poly-Line<sup>®</sup> and Poly-Fit<sup>®</sup>



#### Built-in SS Tube Support

Tube O.D.	1/8	3/16	1/4	5/16	3/8	1/2
Thread Size-B	5/16-24	3/8-24	3/8-24	7/16-24	1/2-24	11/16-20

#### Typical Application

Pneumatic instrumentation circuits, lubricant and cooling lines.

#### Working Pressure and Temperature Ranges

Up to 150 PSI from  $0^{\circ}$ F to + 150°F with thermoplastic tubing. Up to 300 PSI from 0°F to + 175°F with soft metal tubing.

# •Maximum allowable metal tube wall thickness for use with Poly-Tite fittings:

1/8", 3/16" O.D. --no limitation, 1/4" O.D.--.035 5/16", 3/8",1/2" O.D.--.049

#### Vibration

Excellent Resistance.

#### Temperature Range

Depends on tubing used. -65°F to +250°F (-53°C to +121°C) with brass sleeve, -40°F to +150°F (-40°C to +66°C) with plastic sleeve. (Refer to tubing temperature range.)

#### Used With

Aluminum & copper tubing. Hard plastic tubing requires brass sleeve. Not recommended for steel tubing.

#### Tolerance

+/- .02 on all dimensions. Dimension data can change without notice. Please call us when dimen-

sions are critical.

#### Advantages

No flaring of tubing required. Easy installation, captive sleeve, pre-assembled for installation and can be reassembled. Nuts rotate around the sleeve during tightening, preventing twisting of tubing.


#### Assembly Instructions

- 1- Cut tubing to desired length.
- **2-** Slide nut/sleeve assembly on tube. Threaded end "A" of nut must face toward fitting.
- **3-** Bottom tubing into fitting.
- 4- Plastic sleeve Tighten nut hand tight. Brass Sleeve - Tighten nut hand tight, then an

additional 3/4 turn.

\* Note: 1/8 and 3/16 sizes have brass sleeves

# **PUSH-IN/ PUSH-TO-CONNECT FITTINGS**

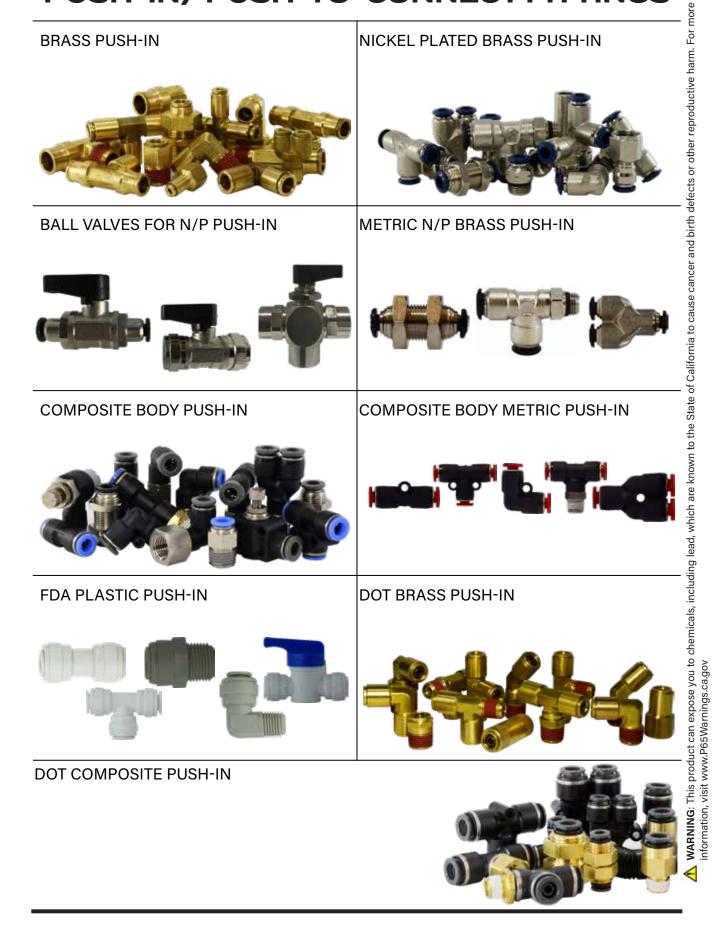

#### BRASS PUSH-IN FITTINGS BRASS FITTINGS

# **BRASS PUSH-IN FITTINGS**



#### ENGINEERING AND DESIGN

• **QUICK CONNECT**, simply push tubing in, no tools. Saves up to 75% of assembly time of standard compression fittings.

• QUICK DISCONNECT, hold two fingers on insert and pull tubing out, no tools required.

• REUSEABLE, connect and disconnect numerous times.

• FULL FLOW DESIGN, provides up to 60% more flow area than conventional fittings with internal tube supports.

• **POSITIVE SEAL**, no leaks. After tubing is inserted, seal is made. • **VERSATILE**, BunaN "O" rings standard. Other materials of "O"

rings available.

• **SECURE TUBE RETENTION**, pulling on tubing only serves to tighten the connection.

SELF CONTAINED ASSEMBLY, no loose parts, brass body and insert.

- BRASS CONSTRUCTION, elbows and tees are forged brass.

- CHOICE of convenient swivel of economical stationary elbows and tees.

• STRAIGHT CONNECTORS have interior hex for Allen key tightening where space is limited...no need to use a wrench.

• **PRE-APPLIED TEFLON** <sup>®</sup> based pipe sealant on all male pipe threads, saving customer additional labor.

• **METRIC SIZES AVAILABLE**: Metric tube sizes from 2mm through 12mm in both standard NPT and metric pipe sizes are available on a special order basis.


#### WORKING TEMPERATURE:

-10°F to 200°F (other ranges available on request).

• PIPE THREAD: NPTF with Teflon <sup>®</sup> based sealant pre-applied.

#### Tolerance

+/- .02 on all dimensions. Dimension data can change without notice. Please call us when dimensions are critical



When tubing (1) is inserted into the fitting, it first passes through the gripping teeth (2). Just beyond the gripping teeth is the o-ring (3) which provides the leak proof seal against the OD of the tube. The gripping teeth grab the tube, which

expands the insert. Pulling back on the tube only tightens the grip as the insert moves onto the camming surface (4). Pressure through the tube also serves to tighten the grip. The tube bottoms against a positive tube stop (5) in a cavity providing tube support to prevent leakage.

#### NICKEL PLATED PUSH-IN FITTINGS BRASS FITTINGS

#### NICKEL PLATED PUSH-IN FITTINGS WITH GLOBAL THREAD

•NPTF • BSPP • BSPT • ISO 7 • ISO 228 • G THREAD • J THREAD



- Saves time and money
- No stripped threads
- No stripped parts
- Reduce inventory

- Completely reusable
- Quick installation
- No pitch identification

Component Parts and Materials			
Body	Brass - Nickel Plated		
Thrust Ring	Acetalic Resin/ Glass filled Nylon		
Sleeve	Brass - Nickel Plated		
Gripper Collet	Stainless Steel		
Safety Ring	PA66		
Lip Seal (1/8 O-Ring Seal)	NBR 70		
Thread Seal	NBR 70		

Max Operating Pressure: Vacuum to 290PSI. Min Temperature: -4°F Max Temperature: 176°F Tubing: Nylon, Polyethylene, Polyurethane. - For best results use 95 Durometer Media: Compressed air, water, vacuum

#### Tolerance

+/- .02 on all dimensions. Dimension data can change without notice. Please call us when dimensions are critical.

### **GLOBAL THREAD**

#### WORKS WITH INCH OR METRIC THREADS



**"Global Thread"** fittings can be assembled with female threads produced to the following standards:

Tapered NPTF Parrallel (BSPP, BSP, ISO 7) Tapered (BSPT, PT, ISO 7, ISO 228)

#### COMPOSITE BODY PUSH-IN FITTINGS BRASS FITTINGS

# **COMPOSITE BODY PUSH-IN FITTINGS**



• For Food Grade, see page 340-343

S	ре	cific	catio	ons

Fluid admitted	Air
Working pressure range	0-150 PSI (10BAR)
Min. Burst pressure	340PSI (23BAR)
Working Temperature	0°F ~160°F
range	

Materia	ls of	Construction:

1	Body	Composite Polyacetal
		(hemopolymer,copolymer)
2	Body	Brass
3	Tube Release	Acetal Resin
4	Retainer	Brass
5	Gripper Ring	Stainless Steel
6	Spacer	Brass
7	O-Ring	NBR 70
8	Threads	Brass w/ white sealant

The latest generation of composite material is used in the body construction in addition to brass on threaded components and stainless steel on the tube gripper.

#### Tolerance

+/- .02 on all dimensions. Dimension data can change without notice. Please call us when dimensions are critical.

# May you live all the days of your life.

- Jonathan Swift

BRASS

# **D.O.T. PUSH-IN TUBE FITTINGS**



Meets D.O.T. FMVSS 571.106 SAE J1131 Air Brake System Require-

#### **Benefits for Cost Savings & Engineering Project**

• **Fast assembly:** No tools required. Simply push tubing in. Saves up to 75% of assembly time compared to standard air compression fittings. No loose parts to handle.

• Fast disconnect: Hold the collet collar with two fingers and pull out tube. No tools required.

• **Reusable:** Can be connected and disconnected several times.

• **Reliable sealing:** Using recommended tubing, full sealing is guaranteed.

• Versatility: Buna N O'ring standard. Viton and others available per request. Secure tube retention. Pulling on tubing only serves to tighten the connection.

• **Pre-Applied Teflon**<sup>\*</sup> based pipe sealant on all male pipe threads, saving customer additional labor.

- Full Flow Design, provides more flow area than con-

DOT Fittings are constructed with an all brass captive eyelet which allows for maximum flow. The brass captive eyelet with extended length is floating and has a machined top end radius for easy installation of tubing. All male threads have a pre-applied Teflon<sup>®</sup> based pipe sealant to provide for easy assembly and leak proof seal.

#### Materials:

#### Brass

"O" Ring: Buna - Nitrile (90 Durometer) EP (Ethylene Propylene)

• Working Pressures & Temperature Ranges Vacuum to 150 PSI

-40°F to 200° F ( -40°C to +93°C )

Dimension data can change without notice. Please check when dimensions are critical.

#### COMPOSITE BODY D.O.T. PUSH-IN BRASS FITTINGS

# COMPOSITE BODY DOT AIRBRAKE FITTINGS

#### WARNING

Composite DOT push-to-connect fittings are designed only for use in applications
where air is utilized as an operating fluid.

Fittings must be used in accordance with manufacturer and industry specifications.
They are not intended for use in environments exceeding 145psi or 140 degrees F.
The Department of Transportation FMVSS 49CFR571-106 prohibits use of this type of fitting for connections between towed and towing vehicles or between a driveshaft and chassis.

 Using Composite DOT fittings in a manner inconsistent with manufacturer specifications may result in serious injury or property damage.


 Under no circumstances shall the supplier be liable to buyer for any consequential or incidental damages of any nature whatsoever arising from nonconformity of goods, defective goods, or delay in shipment or any other breach by seller.

Please feel free to email warning@compdotfitting.com with any questions or concerns.

- \_\_\_\_\_
- One touch connection reduces installation time and cost.
- Rugged ultraviolet and vibration resistant composite body.
- Various shapes and configurations to meet vehicle applications and make installations easier.

#### SPECIFICATIONS FOR FMVSS (D.O.T.) AND SAE COMPLIANT FITTINGS

<b>Operating Fluid</b>	Air						
Max. Operating Pressure	145psi (1.0MPa)						
	Size	5/32"	1/4"	3/8"	1/2"	5/8"	3/4"
Proof Pressure	At 75°F (24°C)	1200psi	1200psi	1400psi	950psi	900psi	800psi
FIOOI FIESSULE	At 200 °F (93°C)			450psi (	3.1MPa)		
Recommended Fluid and Ambient Temperature*	-40°F to 140°F (-40°C to 60°C)						
Leak Rate at -40°F (-40°C)	7 Ncm <sup>3</sup> /min. or less						
Thread	Thread Portion		ANS	I/ASME B1.	20.1, 1983 F	R1992	
	Nut		JIS B 02	208 (Unified	fine thread)	ISO 263	
Thread Sealant			Fluor	ine/ Acrylic			
Applicable Standards		D.O.T. ]	FMVSS 49 C	CFR 571.106	, SAE J2494	3	
Applicable Tubing	Tubing conform	ning to both	SAE J844 a	nd D.O.T. Fl	MVSS 49 CI	FR 571.106.	Material:
			Ν	Vylon12			
Tube O.D.		:	5/32", 1/4", 3	/8", 1/2", 5/	8", 3/4"		



1. Chuck	Stainless steel or Brass	oduc
2. Body	Polybutylene Terephthalate (PBT), Brass	prod
3/4. Tube seal, O-Ring	Buna-N, Nitrile Rubber	This
5. Stud	Brass	
6. Sealant	Flourine/ Acrylic	NING:
7. Guide	Stainless Steel or Polyacetal (Acetal)	WARI
8. Stabilization Ring	Stainless Steel	3
9. Release Button	Polyacetal, POM (Acetal)	$\leq$
10. Tube support	Stainless Steel/ Brass	

#### D.O.T. AIR BRAKE - NYLON TUBING BRASS FITTINGS

# D.O.T. AIR BRAKE - NYLON TUBING



Tube O.D	1/4	3/8	1/2	5/8	3/4
Thread Size-B	7/16-24	17/32-24	11/16-20	13/16-18	1-18

#### Typical Application

Air brake systems except where temperatures exceed +200°F or where battery acid can drip on tubing.

#### Pressure

Maximum operating pressure of 150 PSI.

#### Vibration

Fair resistance.

#### Temperature Range

-40°F to +200°F (-40°C to +93°C).

#### Material

Brass

#### Used With

NT Nylon Tubing - SAE J844 Type A and B.

#### Tolerance

+/- .02 on all dimensions. Dimension data can change without notice. Please call us when dimensions are critical

#### Advantages

Easy to assemble (no tube preparation or flaring required.) Built in tube support. Fittings utilize a ribbed sleeve for compression and positive grip. May be used with copper tubing by replacing nut, sleeve and insert with long nut and spherical sleeve. Insert should be removed for copper tubing use.

#### Conformance

Meets specifications and standards of SAE and DOT FMVSS 571,106.

#### Assembly Instructions

 Cut tubing to desired length.
 Slide nut and then sleeve on tubing. Threaded end of nut "A" must face toward fitting body.
 Insert tubing into the preassembled fitting. Be sure tubing is bottomed in fitting.
 Tighten nut to required torque as indicated on chart.

**Disassembling:** Remove nut and pull tubing out of fitting body. Insert will remain in tubing. **Reassembly:** Push tubing and insert into fitting body until it bottoms. Thread nut onto fitting body

Tube	Additional Number of Turns
Size	from Hand-Tight
1/4	3
3/8, 1/2	4
5/8, 3/4	3-1/2

WARNING: This product can expose you to chemicals, including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, visit www.P65Warnings.ca.gov

#### D.O.T. AIR BRAKE - HOSE/ ENDS BRASS FITTINGS

D.O.T. AIR BRAKE REUSABLE HOSE/ FITTINGS

Typical Application

Air Brake hose connections. Meets SAE & DOT specifications (FMVCS 10 GAL)

#### Pressure

Determined by maximum working pressure for hose size. Up to 125 psi

Temperature:  $-40^{\circ}$ F to  $+ 120^{\circ}$ F ( $-40^{\circ}$ C to  $+48^{\circ}$ C)

#### Advantages

Can be used for nearly any brake line. Easy to assemble with a good selection of hose end configurations. Brass material offers excellent resistance against corrosion.

#### Tolerance

+/- .02 on all dimensions. Dimension data can change without notice. Please call us when dimensions are critical.

#### Assembly Instructions

**1-** Slide nut and sleeve onto hose. Make sure bevel edge of sleeve faces out toward fitting.

2- Push hose into fitting until it bottoms.

**3-** Screw nut until contact is made with body hex.

NOTE: When reassembling fitting, body and nut should be inspected. Only reuse if in proper condition. Sleeves should never be reused.

SLEEVE FERRULE		PART #	HOSE I.D. SIZE	APPROX. WT. LBS.	
TENHOLE		38300	3/8″	0.02	<sup>:</sup>
60HE		38301	1/2″	0.02	
HE60	the second se				

#60HC 3380-A 0903610 367 60RB

NUT

		PART #	HOSE I.D. SIZE	APPROX. WT. LBS.	
61HE	States and American	38306	3/8″	0.04	
HE61		38307	1/2″	0.06	
				61RB #61HC	369 3380-B 0903624

#### NUT FOR USE WITH SPRING

		PART #	HOSE I.D. SIZE	THREAD	APPROX. WT. LBS.	
61HES		38312	3/8″	31/32-20	0.04	
HE61N	A 10 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	38313	1/2″	1-3/32-20	0.06	
						=

#61HCS 0903613 3380-D 61RBSG

#### **SPECIALTY VALVES BRASS FITTINGS**

# **SPECIALTY VALVES AND COCKS** WARNING: This product can expose you to chemicals, including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, visit www.P65Warnings.ca.gov **DRAIN COCKS AIR VALVES** 3, 4 AND 6 WAY NEEDLE **MARINE & ANTI-SIPHON** PANEL MOUNT BALL VALVES TRUCK **MINI BALL** CHECK SOLID BOTTOM SHUT-OFF SPRING BOTTOM SHUT-OFF See our valve section for much, much more! €



#### LEAD FREE LEAD FREE BRASS FITTINGS

# LEAD FREE



#### What is the new lead-free requirement?

In 2011, the Reduction of Lead in Drinking Water Act was signed into law. The Act has reduced the lead content allowed in drinking water system and plumbing materials by changing the definition of "lead-free" in Section 1417of the Safe Drinking Water Act.

The term "lead-free" has been updated from notmore that 8% lead content to mean "**not more than a weighted** average of 0.25% lead when used with respect to the wetted surfaces of pipes, pipe fittings, plumbing fittings and fixtures."


# How do I know which products must meet the new lead-free requirement?

The prohibitions on use and introduction into commerce apply to all pipe, pipe fittings, plumbing fittings, and fixtures (henceforth reffered to as "products"), including stocked inventories that have not been installed. This includes coated or uncoated brass or bronze materials. By using the flowchart below as a guide, you can determine if a product must meet the new lead-free requirement:

#### Lead-Free Requirement Exemptions

(A) The new requirement does not apply to pipes, pipe fittings, plumbing fittings, or fixtures, including backflow preventers, that are used exclusively for nonpotable service such as manufacturing, industrial processing, irrigation, outdoor watering or any other uses where the water is not anticipated to be used for human consumption.

(B) The new requirement does not apply to toilets, bidets, urinals, fill valves, flushometer valves, tub fillers, shower valves, service saddles or water distribution main gate valves 2 inches in diameter or larger.

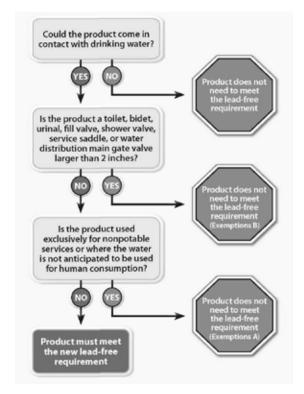

### **FITTING ASSORTMENTS AND DISPLAYS** MAKE YOUR OWN ASSORTMENTS WITH OUR DIFFERENT SIZE OF BINS

A DESCRIPTION OF THE OWNER OF THE
THE OWNER WATER AND ADDRESS OF AD
CONTRACTOR OF A CONTRACTOR OF A CONTRACTOR OF
And A DESCRIPTION OF A
second sublicities for the sublicities of the sublicities of the
and said that the said that a state of the line of the same
THE OWNER AND CONTRACTOR OF TAXABLE PARTY.
And the local data in the second se
LAND DESCRIPTION OF A D
And the Real Property lies and the Party lies of
A REAL PROPERTY AND A REAL PROPERTY AND A
the state of the second s
And the same way have been allogations over the late of the
tert mit mit die und die het mit mit die beringen
and that the net the own the state over the little
and and and and and and into and and
and the second se
and they want have been been been been and the second
Contraction of the local division of the loc
AND DESCRIPTION OF TAXABLE PARTY OF TAXABLE PARTY.
121 121 121 121 120 120 120 120 120 120
And the rest was not been all a sub-
100 101 100 100 100 101 101 100 1001
The same name and the party of the party of the local division of
fall and any part any part and and the same
The reason where the reason of the local division of the local div
101 102 101 101 101 101 101 105 100 101 101 101
URS titt bert bert bert mit 122 122 1221 mit mit 12
CALL THE CALL THE TAX CALL THE TAX IN THE PARTY OF THE PA
the loss have been a set of the s


Fittings Assortments and Displays are available for most product categories. These customer-friendly modular bin displays keep products organized for easier product maintenance. Header cards are also available to assist in proper product/sizing selection. Lift product sales and satisfy customers with these best in industry merchandisers.

- Bin labels color coded by category
- Easy to shop bins keep products organized
  - Space saving slider racks available

For more information, just ask. Bins can be ordered with our without fittings. The Merchandising Kit is the Bins, Labels and headers provided, not the gondola.

FITTINGS ONLY	SIZE	MERCHANDISING	COMPLETE						
FLARE/ COMPRESSION									
97551	Expanded Flare LF 97553 9755								
97561	Expanded Comp LF	97563	97560						
97511	Lead Free Compression/ Flare-Basic - LF	97513	97510						
	NIPPLES AND LF CAST FITT	TINGS							
97436	Stainless Steel Nipples And Fittings	97438	97435						
97446	Stainless Steel Fittings	97448	97445						
90636	LF Brass Pipe Nipples - Asst.	90638	90635						
97646	LF Bronze Fittings - Asst.	97648	97645						
	PIPE AND BARB								
97571	Lead Free Pipe And Hose Barb - LF	97573	97570						
90691	Nylon Fittings	90693	90690						
97811	Pneumatic Tools Fittings Assortment	97823	97825						
	MARINE								
97817	Marine - Pipe & Barb	97863	97865						
97818	Marine - Brass Nipples & Bronze Fittings	97873	97875						
97819	Marine - Nylon	97883	97885						
97820	Marine - The Big 'Un	97893	97895						
	BEVERAGE								
97821	LF Brass & Copper Tubing Beverage Assortment	97903	97905						
97822	PTC NSF Fittings & Plastic Tubing Beverage Assortment	97913	97915						
97824	SS Beverage Fittings and Clearbraid Beverage Assortment	97923	97925						
	TRUCK AND AUTO								
97810	Truck & Auto Assortments	97803	97805						
97812	DOT - Nylon Air Brake Assortment	97833	97835						
97814	DOT - Brass Push-To-Connect Assortment 97843 97845								
97816	DOT - Composite Push-To-Connect Assortment	97853	97855						

# VALVES

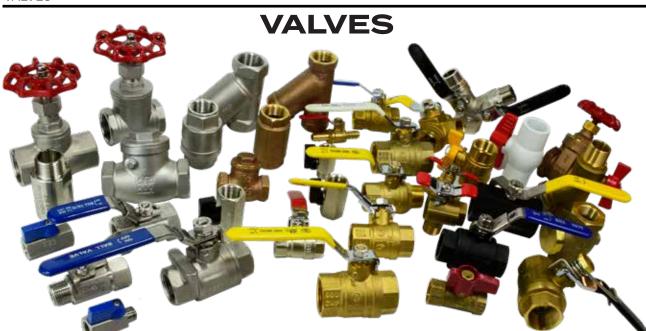

LEAD
FREE

LEAD FREE BALL VALVES	180-182
LEAD FREE VALVES	
Press Valve	184
Pex Valves	185
Full Port Ball	186
Locking Handle	187
Butterfly Handle	187
N/P Ball Valve	
N/P Ball w/SS Trim	189
Italian Ball Valve	190
M X F Ball Valve	191-192
Tee Handle M X F Ball	193
M X F Ball Locking handle	194
Spring Handle Ball Valve	
Right Angle Ball valve	195
Wye, 3-Way Ball Valve	196
Safety Exhaust Ball Valve	196
Gas Valves	197
Mini Ball Valves	198-201
3-Way Valves	
Strainer Ball Valve	
Vacuum Breaker/Hose Bibb	
Bent Nose Garden Valve	
Gate Valves	204

VALVES...... 179-225

Quick Opening Gate	
STAINLESS STEEL VALVES	
2000# Full Port210	
Standard Port211	
1,000 PSI Full Port	
SS Mini Ball Valve 213-214	
Check Valves	
Y-strainer, Globe,Gate	
Carbon Steel valves 220-223	
2,000# Standard Port	
2,000 # FP 2-Piece	
Hi Pressure 2-Way Valves	
Hi Pressure 3-Way Balves	
Check valves-5,000#	
PVC Valves 224-225	

# **BUTTERFLY VALVES**



# **NIPPLES & FITTINGS**

#### NIPPLES NIPPLES AND FITTINGS

# **NIPPLES & FITTINGS**



BRASS & BRONZE 240-269
Brass Nipples - Sch 40 242-247
C/P Brass Nipples
Bronze Fittings249-258
Lead Free Bronze Fittings 249-258
C/P Fittings259-260
USA LF Bronze Fittings 261-265
Extra Heavy USA LF Bronze Fittings 265-266
Bronze Cleanout Plugs
Bronze Drop Ear Elbows
Bronze Barbs for PL. Pipe
Steel Barbs for PL. Pipe
Lead Free Bronze Barbs for PL. Pipe
Stainless Steel Barbs for PL. Pipe
Stainless Steel Well Couplings
Stainless Steel Merchant Couplings 269
STAINLESS STEEL

Stainless Nipples	
150# Cast SS Fittings	270-283
BLACK & GALVANIZED	284-322
Sch. 40 Welded Steel Nipples	284-292
Sch. 80 Seamless Steel nipple	293-298
Sch. XXS Seamless Steel Nipple	
Groove Nipples	300-301
Merchant Couplings	
API Line Couplings	
Malleable Fittings	304-313
Steel Fittings	314-315
300# Malleable	316-317
Bull Plugs and Swages	318-319
Forged Steel Fanges	320-321
Hammer Visions	
Copper Fittings	323-329

#### **BRONZE FITTINGS** NIPPLES AND FITTINGS

# **BRONZE FITTINGS**





Class 125 (150) For steam, water, gas, oil and air service

Standard specifications

Materials - ASTM B62-93 (85,5,5,5) C83600 Dimensions - ANSI B 16.15 Threads - ANSI B2.1 or BA 21 and Fed. WW-P-460C, MSS-SP-106, ANSI/ASME B1.20.1

- UL/ FM Approved
- 1S0 9001:2000
- Not Lead Free
- RoHS Compliant

Bronze threaded fittings are manufactured from smooth-cored castings, designed to provide full flow with minimum restriction. All threads are accurately machined and gauged to ensure a perfect fit with the pipe. All fittings are individually tested under water to ensure quality. Bronze provides a tighter seal and is easier to install than other metals. Can be used for water, plumbing, heating, pneumatic and marine applications, able to resist the harmful effects of corrosion when coming into contact with salt water or fresh water polluted with mineral acids or peaty soils.

# LEAD FREE BRASS FITTINGS



- Approved to ANSI/NSF 61-4 California AB 1953
- Brass fittings conform to AWWA C800
- Brass castings conform to ASTM B584, UNS Alloy C8933
- Brass fittings dimensions conform to ASME B16.15
- Meets Federal State Drinking Water Act, Lead Free Requirement •NPT threads on all fittings conform to ASME B1.20.1
  - Brass unions conform to specification A-A-59617
  - Manufacturing facilities are ISO 9001:2008

WARNING: This product can expose you to chemicals, including Nickel, which are known to the State of California to cause cancer For more information, visit www.P65Warnings.ca.gov

◄

#### SCH 40 STAINLESS STEEL NIPPLES NIPPLES AND FITTINGS



#### **SCHEDULE 40 WELDED**

Stainless steel pipe nipples are manufactured from stainless steel pipe that conforms to specification ASTM A312/ SA312.

All stainless steel nipples conform to specification ASTM A733. Threads conform to the requirements of ANSI B1.20.1.

#### 304

The basic alloy. Type 304 (18-8) is an austenitic steel possessing a minimum of 18% chromium and 8% nickel, combined with a maximum of 0.08% carbon. It is a nonmagnetic steel which cannot be hardened by heat treatment, but instead. must be cold worked to obtain higher tensile strengths.

Because of its ability to withstand the corrosive action of various acids found in fruits, meats, milk, and vegetables,

Type 304 is especially suited for all types of dairy equipment piping and valves, the brewing industry, the citrus and fruit juice industry, and in food processing applications. Also used for the dye tanks, pipelines buckets, dippers, etc. that come in contact with the lormic, acetic, and other organic acids used in the dyeing industry.

In the marine environment, because of it slightly higher strength and wear resistance than type 316 it is also used for nuts, bolts, screws, and other fasteners. It is also used for springs, cogs, and other components where both wear and corrosion resistance is needed.

Both #304 and #316 nipples are NSF/ANSI 372 and NSF/ANSI 61 compliant.

# STAINLESS STEEL NIPPLES



#### **SCHEDULE 80 SEAMLESS**

- SEAMLESS FOR UNRESTRICTED FLOW
- USE WITH AIR, WATER, OIL, NATURAL GAS, STEAM
- FITTINGS: USE THREADED CLASS 3000 HIGH-PRESSURE STAINLESS STEEL.
- ASTM A733 ASTM A312 ANSI/ ASME B1.20.1
- PSI 3000

#### 316

For severe environments. Of course, there are many industrial processes that require a higher level of resistance to corrosion than Type 304 can offer. For these applications, Type 316 is the answer.

In type 316, the nickel content is increased slightly. What distinguishes Type 316 from Type 304 is the addition of molybdenum up to a maximum of 3%.

Molybdenum increases the corrosion resistance of this chromium-nickel alloy to withstand attack by many industrial chemicals and solvents, and, in particular, inhibits pitting caused by chlorides. As such, molybdenum is one of the single most useful alloying additives in the fight against corrosion.

Type 316 can withstand corrosive attack by sodium and calcium brines, hypochlorite solutions, phosphoric acid; and the sulfite liquors and sulfurous acids used in the paper pulp industry. This alloy, therefore, is specified for industrial equipment that handles the corrosive process chemicals used to produce inks, rayons, photographic chemicals, paper, textiles, bleaches, and rubber. Type 316 is also used extensively for surgical implants within the hostile environment of the body.

Type 316 is the main stainless used in the marine environment, with the exception of fasteners and other items where strength and wear resistance are needed, then Type 304 (18-8) is typically used.

#### 304 AND 316 150# SS FITTINGS NIPPLES AND FITTINGS

# STAINLESS STEEL FITTINGS



150# 304 & 316 Stainless Steel Fittings

Our high quality standard pattern 150lb rated stainless steel threaded fittings are manufactured to the highest standards. All stainless steel fittings are monitored by our quality control personnel for strict compliance with applicable standards and specifications.

These stainless steel pipe fittings are excellent for uses that involve chemicals or liquids that may be corrosive. Along with fighting corrosion, a stainless steel pipe fitting will prevent contamination making it useful to many professionals.

- Use with air, water, oil, natural gas, steam
- NPT and FNPT threads conform to ASME B1.20.1
- Maximum Pressure: 300 psi @ 72 F;150 psi @ 366 F for steam
- Maximum Steam Pressure: 150 psi
- Material Conforms to ASTM A-351. Class 150 Pressure Ratings
- Manufacturing facility is ISO 9001:2008

• 304 Stainless Steel is economically priced, chromium-nickel material that offers very good corrosion resistance. 316 Stainless Steel has higher nickel content and contains molybdenum for even better corrosion resistance.

**HIGH PRESSURE 1000# BARSTOCK** 




1000#

- Stainless bar stock dimensions conform to MSS SP-114
- NPT threads conform to ASME B1.20.1
- Manufacturing facility is ISO 9001:2008
- Fittings meet applicable chemical & physical properties

HIGH PRESSURE 3000# FORGED

A182 and ANSI/ASME B16.11.

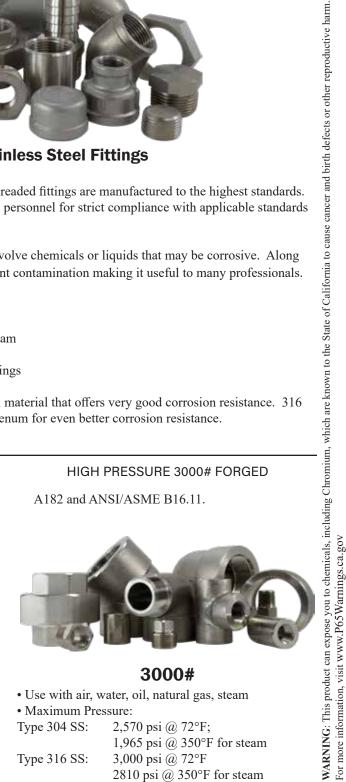

#### 3000#

• Use with air, water, oil, natural gas, steam

• Maximum Pressure:

Type 304 SS:	2,570 psi @ 72°F;
	1,965 psi @ 350°F for steam
Type 316 SS:	3,000 psi @ 72°F
	2810 psi @ 350°F for steam

• Pipe Nipples and Pipe: Use threaded Schedule 80 thickwall stainless steel

€



# **BLACK AND GALVANIZED STEEL NIPPLES**

#### **Product Specifications**

Welded steel pipe nipples both galvanized and black in diameters ranging from 1/8" up to 4" in lengths from close to 12" and cut-pipe up to 120". -200°-150° Temp Rating.

#### **Technical Specifications**

**Standards:** Product complies with ASTM A-53, A-733 and ANSI B1.20.1 for threading, dimensions and pipe specifications.

**Pipe:** Complies with ASTM A-53 mill tested schedule 40 and 80 for both Welded & Seamless Meets ANSI B36.1. **Galvanized:** Zinc coating applied by hot dipped. Galvanized complying with ASTM A-123, NSF approved, RoHS compliant.

#### Black: Protected against oxidation with varnish coating.

**Cutting Procedure:** All pipe is roller cut. A visual inspection of seams, excessive galvanizing, mid-welds, poor galvanizing, bends, roundness, under and over weight of the pipe is made at the time it is cut. This is done for every length of pipe. Pipe lengths are cut to a tolerance of + or -1/16'' of the actual length.

#### **Threading Procedure:**

All pipe is chaser thread cut to American Standard Tapered Pipe Thread standards. This is 3/4" taper per foot. Pipe is visually inspected for roundness of threads and other visual faults as it is removed from the threading machine.

# SCHEDULE 80 XXS SEAMLESS

**XXS SEAMLESS** 



- ASTM A106 Grade B Seamless Pipe
- ASTM A 53
- WWN 351
- Standard NPT Tapered Pipe Threads as per ANSI B 1.20.1 Specification

the State of California to cause known to which are WARNING: This product can expose you to chemicals, including Cobalt, For more information, visit www.P65Warnings.ca.gov ⋞

cancel

#### MALLEABLE FITTINGS NIPPLES AND FITTINGS

# MALLEABLE FITTINGS



#### ISO 9002 - CERTIFICATE OF QUALITY - UL/FM LISTED

Our quality fittings are made with care and attention to detail. With better molds we can reduce parting lines and rough edges resulting in better fluid flow. By using a low temperature galvanizing process the coating is more durable which means a longer lasting fitting. All Fittings are 100% Pressure Tested to 300# Class.

(Every fitting is subjected to an underwater fitness test to ensure the highest quality)

#### **SPECIFICATIONS**

• MATERIAL: ASTM A 197 - Cuppla Malleable Iron, ASTM A 153 - Hot dipped galvanizing • Coating ASTM A164 LS

• DIMENSIONS: ANSI B 16.3 - Malleable Iron threaded fittings, ANSI B 16.14 -

Ferrous Pipe Plugs, Bushings etc..., ANSI B 16.39 - Malleable Iron threaded pipe unions.

• THREADS: ANSI B 2.1 or BS 21 ASME B1.20.1 • RoHS Compliant • Tapered Threads

- Pressure Saturated steam 150 PSI @350°F: Max pressure 300 PSI 150°F
- Temperature range -20 350°F



• 1010 Carbon Steel, 3/4 taper threads (see hydraulic section for 7/8 taper threads.)

- Finish or coating Black Dipped in rust resistant
- · Galvanized, Zinc Plated (Inside and Out)

#### **BULL PLUGS AND SWAGES**



 Saturated steam pressure 150 PSI @ 350°F

- Max pressure 300 PSI @ 150°F
- Temp range -20°F to 350°F

#### MALLEABLE IRON - ANSI B

MALLEADLE MON - ANOID								
16.3								
F°	Class	Sizes	Sizes	Sizes				
	150	1/4-1	11/4-2	2 1/4-3				
	PSIG	300#	300#	300#				
-200-	300	2000	1500	1000				
150								
200	265	1785	1350	910				
250	225	1575	1200	825				
300	185	1360	1050	735				
366*	150	1150	900	650				

\*Permissible for service temperature up to 366°F, reflecting the temperature of saturated steam at 150 psig.



**300Ib MALLEABLE FITTINGS** 

Max. pressure: 300 psi WOG @ 72°F; 150 psi WOG saturated steam

- Meet ANSI/ ASME B1.20.1 standards
- Black meet ASTM 197 standards

FLANGES



WARNING: This product can expose you to chemicals, including Chromium, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, visit www.P65Warnings.ca.gov

◄

#### WROT SOLDER JOINT NIPPLES AND FITTINGS

## **COPPER FITTINGS**



#### SYMBOL OF JOINT ENDS

- C Solder joint fitting end made to receive copper tube diameter
- Ftg. Solder joint fitting end made to copper tube diameter
- F Internal ANSI Standard Taper Pipe Thread-Female
- M External ANSI Standard Taper Pipe Thread-Male Threaded ends ANSI/ ASME B1. Solder ends ASTM B88

• Temp range 32° to 200°F • Pressure @100° - 1/8-1 : 500 PSI - 1-1/4-2 : 400 PSI - 2-1/2 - 3: 300 PSI

NSF - 61 CERTIFIED ALLOY C12200

#### THE ABOVE CONFORMS TO ASTM B 88 & ASTM B 306, A 306

A T K K MALE (FITTING)								1.		∠∎	F	
	Joint End					^						
Nom-	Male End	1				Female E	nd	ï			Metal	Inside
inal Size	Outside Diam- eter (A) in	Average Toler- ance (mm)	Ac- tual MIN in	O.D. MAX in		Inside Diam- eter F (in)	Average Toler- ance (mm)	Ac- tual MIN in	O.D. MAX in		Thick- ness T (in)	Diam- eter O (in)
1/8	2/8		2/8	2/8	3/8	2/8		2/8	2/8	3/8	0	2/8
1/4	3/8		3/8	3/8	3/8	3/8	]	3/8	3/8	3/8	0	2/8
3/8	4/8	0.02	4/8	4/8	3/8	4/8		4/8	4/8	3/8	0	3/8
1/2	5/8	0.03	5/8	5/8	4/8	5/8	0.03	5/8	5/8	3/8	0	4/8
5/8	6/8		6/8	6/8	5/8	6/8	1	6/8	6/8	5/8	0	4/8
3/4	7/8		7/8	7/8	6/8	7/8		7/8	7/8	5/8	0	5/8
1/8"	1/4"	3,	/8"	1	/2"	5/	/8"	3/	4"		1"	
	1-1/4" 1-1/										2"	

# PLASTIC PIPE PLASTIC FITTINGS

# PLASTIC FITTINGS



PIPE FITTINGS	HOSE BARB FITTINGS
	FIFT
• Nylon • Polyethylene • Polypropylene	<ul><li>Nylon</li><li>Polyethylene</li><li>Polypropylene</li></ul>
NYLON & POLYPROPYLENE COMPRESSION FITTINGS	POLYPROPYLENE PUSH-IN TUBE FITTINGS AND VALVES
	C.C. Store
Machined Schedule 80 PVC nipples comply fully with ASTM D2464,	• NSF 61 certified for use with drinking (potable) water
	<ul><li>Max Temperature: 140°F</li><li>Max Pressure: Not Rated</li></ul>
SCH 40 PVC FITTINGS	SCH 80 PVC FITTINGS
15555	
• NSF 61 certified for use with drinking (potable) water	PVC Material is Type 1 according to the American Society for Testing Materials (ASTM) D-1784. Fittings
<ul> <li>Max Temperature: 140°F</li> <li>Max Pressure: Not Rated Resistant to corrosion, strong and rigid - commonly used in low pres- sure plumbing applications. ASTM D1784 and D2466.</li> </ul>	conform to ASTM D-2464 & ASTM D-2467. Temperature rating is 140°F. PSI is based on water at 73°F. Derate 50% at 110°F and 78% at 140°F. Not recommended for use in compressed air or gas systems.
	<ul> <li>And Annual</li> <li>Annual</li> <li>Annual</li></ul>

HOSE ACCESSORIES

# **HOSE ACCESSORIES**



**CAM AND GROOVE** 



ALUMINIUM



POLYPROPLYENE



**STAINLESS STEEL** 



BRASS



# HOSE CLAMPS




# TUBING





# HIGH PRESSURE SPRAYERS

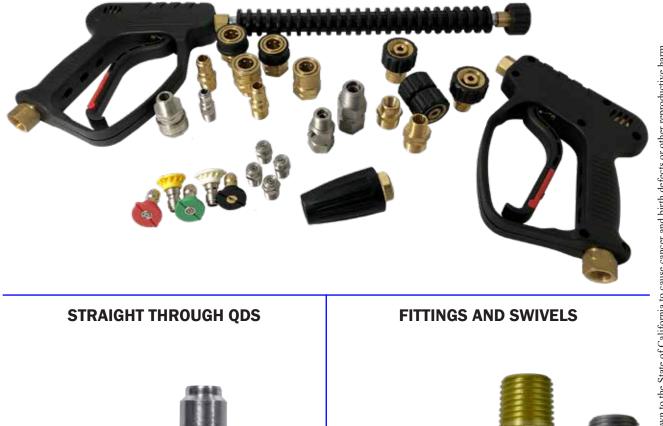



WARNING: This product can expose you to chemicals, including Chromium, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, visit www.P65Warnings.ca.gov

# PNEUMATICS

# PNEUMATICS




www.P65Warnings.ca.gov

4

#### **AIR COILS** TRUCK AND TRAILER

# **TRUCK AND TRAILER**

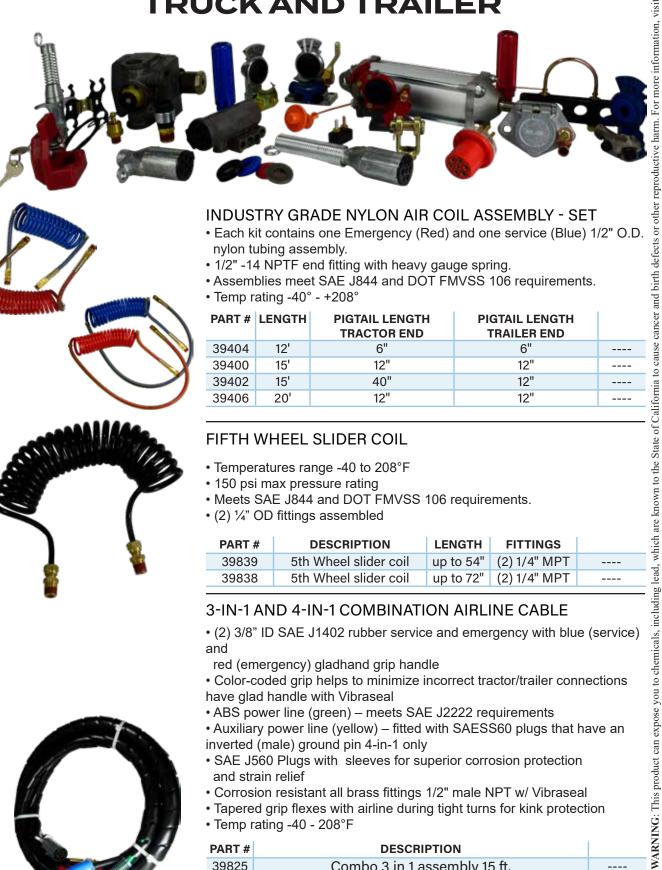

#### INDUSTRY GRADE NYLON AIR COIL ASSEMBLY - SET

- · Each kit contains one Emergency (Red) and one service (Blue) 1/2" O.D. nylon tubing assembly.
- 1/2" -14 NPTF end fitting with heavy gauge spring.
- Assemblies meet SAE J844 and DOT FMVSS 106 requirements.
- Temp rating -40° +208°

Ρ	PART #	LENGTH	PIGTAIL LENGTH TRACTOR END	PIGTAIL LENGTH TRAILER END	
З	39404	12'	6"	6"	
З	39400	15'	12"	12"	
З	39402	15'	40"	12"	
З	39406	20'	12"	12"	

#### FIFTH WHEEL SLIDER COIL

- Temperatures range -40 to 208°F
- 150 psi max pressure rating
- Meets SAE J844 and DOT FMVSS 106 requirements.
- (2) <sup>1</sup>/<sub>4</sub>" OD fittings assembled

	PART #	DESCRIPTION	LENGTH	FITTINGS	
	39839	5th Wheel slider coil	up to 54"	(2) 1/4" MPT	
l	39838	5th Wheel slider coil	up to 72"	(2) 1/4" MPT	

#### 3-IN-1 AND 4-IN-1 COMBINATION AIRLINE CABLE

• (2) 3/8" ID SAE J1402 rubber service and emergency with blue (service) and

red (emergency) gladhand grip handle

· Color-coded grip helps to minimize incorrect tractor/trailer connections have glad handle with Vibraseal

- ABS power line (green) meets SAE J2222 requirements
- Auxiliary power line (yellow) fitted with SAESS60 plugs that have an inverted (male) ground pin 4-in-1 only
- SAE J560 Plugs with sleeves for superior corrosion protection and strain relief
- Corrosion resistant all brass fittings 1/2" male NPT w/ Vibraseal
- Tapered grip flexes with airline during tight turns for kink protection
- Temp rating -40 208°F

PART #	DESCRIPTION	
39825	Combo 3 in 1 assembly 15 ft.	
39962	Combo 4 in 1 assembly 15 ft.	



#### HYDRAULIC ADAPTERS HYDRAULIC ADAPTERS

# HYDRAULIC ADAPTERS & ACCESSORIES



#### STEEL ADAPTERS

#### Technical information ... 496

Profile size chart 502
Steel Pipe Swivels 504
37° JIC Flare Straights 506
37° JIC Flare Shapes 508
Bulkhead Adapters 510
Steel Pipe Fittings512
O-Ring Adapters Straight.517
JIC Swivels519
O-Ring Adapters 520
O-Ring Face Seal 523
BSPT/ BSPP Adapters 527
Metric Adapters 529
Flange Adapters536
Stainless Steel Adapters 540
SS Hose Fittings555

#### HYDRAULIC QUICK DISCONNECTS

Thread to Connect - Wing	531
ISO A Interchange	531
ISO B Interchange	531
Flush Face ISO	532
VEP Series	532
AG Interchange	533
Hydraulic Jack Q/D	533

# HYDRAULIC VALVES & ACCESSORIES

Flow Control Valve	. 534
Variable Flow Control	. 535
Air Breathers	. 535

#### **PLATING SPECIFICATION**

Our standard Trivalent, Cr<sup>+3</sup> plating performs at nearly double the S.A.E. corrosion resistance requirement. The plating meets ASTM B633, Fe/Zn 5. The thickness is 5um-13um. This plating is silver in appearance and has been testing at 96 hours to white rust and 120 hours to red rust.

**STAINLESS STEEL ADAPTERS #316 STAINLESS STEEL ADAPTERS STAINLESS STEEL ADAPTERS PIPE SWIVELS JIC FITTINGS BULKHEAD FITTINGS** PIPE FITTINGS SAE O-RING BOSS JIC FEMALE SWIVELS HOSE CRIMP FITTINGS ALL MALE THREADS SHIPPED WITH **PROTCTIVE COVER**