


SPECIALTY VALVES

BRASS FITTINGS

GROUND PLUG SHUT-OFF COCKS

NON-LUBRICATED PLUG VALVES are designed to operate in systems where INSTANTANEOUS PORT SELECTION is desired. Since LUBRICANTS ARE NOT USED, relubrication is not required. There is no lubricant to freeze and lock the valve or to contaminate fine fluids. The O-RING SEALED CAP and STEM eliminate leakage to atmosphere. The mating BRASS BODY and CELCON PLUG produce a fine seal that WILL NOT SEIZE OR GALL.

Designed for PANEL or BRACKET MOUNTING. They are generally recommended for operation in GASOLINE, OIL, AIR, WATER and DETERGENT systems from minus 40° to 180°F, at a maximum operating pressure of 30 p.s.i.g. The fluid port size is 9/32 (.281) diameter for 1/8 and 1/4 sizes, 5/16 (.312) diameter for the 3/8 size. **(Consult factory for applications requiring a higher pressure).**

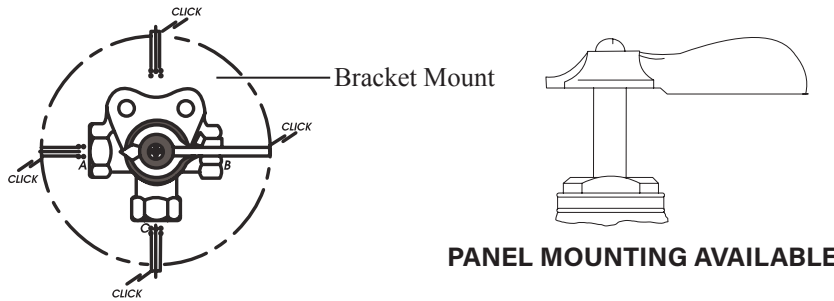


PANEL MOUNTING AVAILABLE

Type 1 (Standard)

A pronounced "click" may be felt at each position.
Handle travel is not restricted.

THREE-WAY VALVES (Side Outlet)



- 1-3/8" Stem
- Side Outlet
- Bracket Mounting
- O-Ring Sealed
- 4-way celcon roter standard

LESS CLICK

MIDLAND	AMC	CHAMPION	LIST	A-B-C FEMALE PIPE THREAD	LENGTH OF STEM	MAF #	MAF PRICE
46247		110C-J		1/4	1-3/8"		
46248		110C-N		3/8	1-3/8"		

M-108-MID WITH CLICK 360°

MIDLAND	AMC	CHAMPION	LIST	A-B-C FEMALE PIPE THREAD	LENGTH OF STEM	MAF #	MAF PRICE
46250	09508-02	108SD-2		1/8	1-3/8"	210C-2	----
46251	09508-04	108SD-4		1/4	1-3/8"	210C-4	----
46252	09508-06	108SD-6		3/8	1-3/8"	210C-6	----

V406P 6749

Openings:

Handle Pointer over A.....Valve Open A-C

Handle Pointer over C.....Valve Open B-C

Handle Pointer over B.....Valve "OFF"

Handle Pointer over Bracket.....Valve "OFF"

WARNING: This product can expose you to chemicals, including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, visit www.P65Warnings.ca.gov




SPECIALTY VALVES

BRASS FITTINGS

GROUND PLUG SHUT-OFF COCKS

THREE-WAY VALVES (Bottom Outlet)



- 1-3/8" Stem
- Side Outlet
- Bracket Mounting
- O-Ring Sealed
- 4-way celcon roter standard

Openings:

Handle *Pointer* over A.....Valve Open A-C
 Handle *Pointer* over B.....Valve Open B-C
 Handle *Pointer* over Bracket.....Valve "OFF"


LESS CLICK

MIDLAND	AMC	CHAMPION	LIST	A-B-C FEMALE PIPE THREAD	LENGTH OF STEM	MAF #	MAF PRICE
46241		120C-L		1/4	1-3/8"	120C-4	----

WITH CLICK 360°

MIDLAND	AMC	CHAMPION	LIST	A-B-C FEMALE PIPE THREAD	LENGTH OF STEM	MAF #	MAF PRICE
46243		220C-J		1/8	1-3/8"	220C-2	----
46244		220C-L		1/4	1-3/8"	220C-4	----

FOUR-WAY VALVES



- Side Outlet
- Bracket Mounting
- O-Ring Sealed
- 4-way celcon roter standard

Openings:

Handle *Pointer* over A.....Valve Open A-D
 Handle *Pointer* over C.....Valve Open C-D
 Handle *Pointer* over B.....Valve Open B-D
 Handle *Pointer* over Bracket.....Valve "OFF"

LESS CLICK

MIDLAND	AMC	CHAMPION	LIST	A-B-C-D FEMALE PIPE THREAD	LENGTH OF STEM	MAF #	MAF PRICE
46257		100C-L		1/4	1-3/8"	220C-4LC	----

M-114-MID WITH CLICK (360°)

MIDLAND	AMC	CHAMPION	LIST	A-B-C-D FEMALE PIPE THREAD	LENGTH OF STEM	MAF #	MAF PRICE
46255	09514-04	114SD		1/4	1-3/8"	200C-4	----
46256	09514-06	200C-N		3/8	1-3/8"	200C-6	----

WITH 2-3/8" LONG STEM M-115-MID

MIDLAND	AMC	CHAMPION	LIST	A-B-C-D FEMALE PIPE THREAD	LENGTH OF STEM	MAF #	MAF PRICE
46260	09515-04	105C-L		1/4	2-3/8"	215C-4	----
	09515-06			3/8		215C-6	----

WARNING: This product can expose you to chemicals, including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, visit www.P65Warnings.ca.gov

BRASS

V407P