

DRAIN COCKS

BRASS FITTINGS


MADE IN THE USA

DRAIN COCKS

- For use with low pressure air, water and fluids.
- Designed for a working pressure of 150 psi @ 250°.
- Hand-tightening provides a metal-to-metal seal.
- Not intended for natural gas, LPG, nuclear or aircraft applications.

Install on your tank for easy draining


GASOLINE SHUT OFF W/ SCREEN FILTER



MAF #	REF #	BARB X MALE PIPE	A	B	C	APPROX. WT. LBS.	LIST
MA6600	46064	1/4" x 1/8"	0.55	1.34	0.66	0.06	87.21

827


DRAIN COCK 150 PSI - TRUNK AIR TANK



MAF #	REF #	MALE PIPE	A	B	APPROX. WT. LBS.	LIST
DRC601-4	46066	1/4"	1.73	1.41	0.22	...


DCR601-4

TRUCK DRAIN - 125 P.S.I.G



MAF #	REF #	MALE PIPE	INDUSTRY NUMBER	A	B	HEX	APPROX. WT. LBS.	LIST
H37P	46067	1/8"		1.53	1.95	0.62	0.14	20.20


SHUT OFF - 150 P.S.I MAX.



MAF #	REF #	MALE PIPE X FEMALE PIPE	INDUSTRY NUMBER	A	B	HEX 1	HEX 2	APPROX. WT. LBS.	LIST
H49P	46069	1/4"	W20332	1.96	1.96	0.75	0.62	0.20	23.21

#60HC 3380-A 0903610 367

LEVER HANDLE



MAF #	REF #	MALE PIPE	INDUSTRY NUMBER	A	B	HEX	APPROX. WT. LBS.	LIST
41P	46070	1/8"	M-41-P	1.99	1.80	0.62	0.04	16.67
42P	46071	1/4"	M-42-P	2.06	1.81	0.62	0.06	16.13
43P	46072	3/8"	M-43-P	2.30	2.29	0.81	0.08	23.11
44P	46073	1/2"	M-44-P	3.00	2.50	0.87	0.16	54.89

- 30 psi

*Valve is closed when handle is in the position of the picture

840 41D DC601

WARNING: This product can expose you to chemicals, including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, visit www.P65Warnings.ca.gov

MID-AMERICA FITTINGS

DRAIN COCKS

BRASS FITTINGS


MADE IN THE USA

AIR TANK DRAIN PULL VALVE



MAF #	REF #	SIZE	DESCRIPTION	LIST
MA1421-60	39595	1/4" male	5ft nylon coated pull cable	76.90
MA595-60				14.99
MA595-48	39596	1/4" male	4ft nylon coated pull cable	12.13
MA595-36	39597	1/4" male	3ft nylon coated pull cable	23.18
MA595	39600	1/4" male	Air valve only	14.99


INTERNAL SEAT



MAF #	REF #	MALE PIPE	INDUSTRY NUMBER	A	HEX	APPROX. WT. LBS.	LIST
MA6783	46079	1/8"	6783	1.45	0.55	0.02	22.95

DC602 808 400A 1800A


INTERNAL SEAT - WING NUT HANDLE



MAF #	REF #	MALE PIPE	INDUSTRY NUMBER	A	HEX	APPROX. WT. LBS.	LIST
MA130	46074	1/8"	130	0.92	0.40	0.04	21.77
MA140	46075	1/4"	140	0.94	0.56	0.06	110.92
MA230	46077	3/8"	230	1.27	0.68	0.08	9.55

HB - 5/16 803 305A

LONG INTERNAL SEAT



MAF #	REF #	SIZE	IND #	A	HEX	APPROX. WT. LBS.	LIST
MA185	46078	1/8 MIP	1.85				13.22

809

MA185


PIN HANDLE - INTERNAL SEAT



MAF #	REF #	MALE PIPE	INDUSTRY NUMBER	A	HEX	APPROX. WT. LBS.	LIST
200P	46080	1/8"	M-200-P	1.22	0.50	0.04	19.14
201P	46081	1/4"	M-201-P	1.31	0.56	0.06	12.87
202P	46082	3/8"	M-202-P	1.53	0.68	0.12	15.89

DC603 802

EXTERNAL SEAT W/ SPOUT



MAF #	REF #	MALE PIPE	INDUSTRY NUMBER	A	HEX	APPROX. WT. LBS.	LIST
421P	46084*	1/4"	6788	1.56	0.56	0.02	11.19

* Replaces GM # 511771 & Chrysler #836015

200A 239 DC606 807

WARNING: This product can expose you to chemicals, including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, visit www.P65Warnings.ca.gov

DRAIN COCKS

BRASS FITTINGS

MADE IN THE USA

BIBB VALVE



MAF #	REF #	MALE PIPE	INDUSTRY NUMBER	A	B*	C	APPROX. WT. LBS.	LIST
302P	46088	1/8"	150	0.82	1.60	0.55	0.04	27.83
303P	46089	1/4"	120	0.89	1.59	0.54	0.06	20.38
MA6660	46089A	1/4"	6660	0.55	1.34	0.66	0.06	21.78

* With valve closed

804 DC607 2019 201DH

RADIATOR TYPE - EXTERNAL SEAT



MAF #	REF #	MALE PIPE	INDUSTRY NUMBER	IND #	A	HEX	APPROX. WT. LBS.	LIST
320P	46085	1/8"	M-320-P	135	0.90	0.43	0.02	4.58
321P	46086	1/4"	M-321-P	145	1.00	0.56	0.04	4.41
322P	46087	3/8"	M-322-P	270	1.25	0.68	0.08	14.64
323P	46083	1/2"	108	108	1.48	0.87	0.12	37.31

320D 240 DC604 801

PLASTIC DRAIN COCKS

MAF #	REF #	DESCRIPTION	IND #	A	HEX	APPROX. WT. LBS.	LIST
MA110		Chrysler					18.29
MA113		Ford					11.35
MA118		M10 x 1.25					14.06
MA119		M12 x 1.5					19.70
MA121		M14 x 2.0					9.58
MA124		M14 x 2 Ford					13.54
MA126		5/8" x 8					19.30
MA127		GM					22.94

WARNING: This product can expose you to chemicals, including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, visit www.P65Warnings.ca.gov

MID-AMERICA FITTINGS

SHUT-OFF COCKS

BRASS FITTINGS

MADE IN THE USA

- Designed for working pressure of 30 PSI.
- Instantaneous off-on operation with 360° rotation.
- Forged brass bodies and brass handles.
- Not good for gasoline.

FLARE X MIP



MAF #	REF #	FLARE X MIP	IND. #	A	B	HEX	APPROX. WT. LBS.	LIST
27SAE	46100	1/4" x 1/8"						22.54
227SAE	46101	1/4" x 1/4"						22.54
29SAE	46102	5/16" x 1/8"						18.22
229SAE	46103	5/16" x 1/4"						23.26
57SAE	46104	3/8" x 1/4"						21.56
67SAE	46107	1/2" x 3/8"						26.28
77SAE	46108	1/2" x 1/2"						39.38

FLARE X FLARE



MAF #	REF #	FLARE X MIP	IND. #	A	B	HEX	APPROX. WT. LBS.	LIST
28SAE	46115	1/4"						19.78
30SAE	46116	5/16"						34.34
58SAE	46117	3/8"						21.84
68SAE	46118	1/2"						27.03
1010SAE	46119	5/8"						54.05


FLARE X FIP



MAF #	REF #	FLARE X MIP	IND. #	A	B	HEX	APPROX. WT. LBS.	LIST
161SAE	46125	3/8" x 1/2"						58.47
163SAE	46127	3/8" x 3/8"						64.26
164SAE	46128	1/2" x 1/2"						58.07
161SSAE*	46126	3/8" x 1/2"						39.43
167SAE		5/8" x 3/4"						91.51

* 9/16 -24 Thread

COMPRESSION X MALE PIPE




MAF #	REF #	COMP X MALE PIPE	IND. #	A	B	HEX	APPROX. WT. LBS.	LIST
27C	46130	1/4" x 1/8"	27-C	1.87	1.81	0.51	0.14	19.22
227C	46131	1/4" x 1/4"	227-C	2.05	1.86	0.62	0.15	23.98
29C	46132	5/16" x 1/8"	29-C	2.05	1.90	0.50	0.16	20.00
229C	46133	5/16" x 1/4"						24.44
57C	46134	3/8" x 1/4"	57-C	2.05	1.83	0.62	0.15	24.83
557C	46-135	3/8" x 3/8"	557-C	2.05	2.30	0.62	0.18	62.45

868 V304C 2068 133C VC206

COMPRESSION X COMPRESSION

* See pg. 73-74 to order nut and sleeve separately.



MAF #	REF #	COMP X COMP	IND. #	A	B	APPROX. WT. LBS.	LIST
28C	46140	1/4"	28-C	1.82	1.84	0.12	20.58
30C	46141	5/16"	30-C	1.84	1.88	0.14	21.54
58C	46142	3/8"	58-C	1.87	1.80	0.14	22.54
68C	46143	1/2"	68-C	2.21	2.32	0.22	32.09

V3030F 2062 134C


WARNING: This product can expose you to chemicals, including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, visit www.P65Warnings.ca.gov

SHUT OFF COCKS

BRASS FITTINGS

MADE IN THE USA

FEMALE X FEMALE PIPE




Hex

MAF #	REF #	FEMALE PIPE X FEMALE PIPE	A	B	HEX	APPROX. WT. LBS.	LIST
31P	46151	1/8"	1.77	1.79	0.56	0.12	16.70
32P	46152	1/4"	2.28	1.82	0.69	0.20	17.12
H32P	46152T*	1/4"	2.28	2.00	0.68	0.20	25.52
40P	46153	3/8"	2.44	2.28	0.81	0.30	28.89

* 150 PSI

V403P 132C 875

MALE PIPE X FEMALE




Hex²

MAF #	REF #	MALE PIPE X FEMALE PIPE	IND. #	A	B	HEX 1	HEX 2	APPROX. WT. LBS.	LIST
48P	46160	1/8"	48-P	2.03	1.84	0.50	0.56	0.14	16.37
49P	46161	1/4"	49-P	2.26	1.79	0.69	0.69	0.18	17.91
H49P	46161T*	1/4"		2.26	1.98	0.69	0.69	0.20	23.21
50P	46162	3/8"	50-P	2.33	2.28	0.82	0.82	0.28	29.00

* 150 PSI

880 V402P 130C

MALE PIPE X MALE PIPE



Hex

MAF #	REF #	MALE PIPE X MALE PIPE	IND. #	A	B	HEX	APPROX. WT. LBS.	LIST
76P	46165	1/8"	76-P	2.15	1.80	0.69	0.12	17.27
77P	46166	1/4"	77-P	2.22	1.84	0.70	0.17	19.49
H77P	46166T*	1/4"		2.23	2.00	0.68	0.18	23.94
78P	46167	3/8"	78-P	2.43	2.24	0.82	0.22	32.17

* 150 PSI

1V401P 890

TUBE X MALE PIPE - LEFT & RIGHT

MAF #	REF #	MALE PIPE X MALE PIPE	IND. #	A	B	HEX	APPROX. WT. LBS.	LIST
89CL		1/4" x 1/8" Left						56.85
89CR		1/4" x 1/8" Right						56.85

WARNING: This product can expose you to chemicals, including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, visit www.P65Warnings.ca.gov

MID-AMERICA FITTINGS

NEEDLE VALVES

BRASS FITTINGS

MADE IN THE USA

NEEDLE VALVES


THESE ARE NOT LEAD FREE SEE PAGES 169 FOR LEAD FREE PRODUCTS

Made with either pin handle or pressed on handle.
Please specify if you have a preference.

- Used on instrumentation, hydraulic, and pneumatic systems.
- Designed for a maximum working pressure of 150 PSI. or

- Provided with steel handles and metal-to-seats with fine-thread screwdown.
- Not designed for natural gas, LPG, nuclear aircraft applications.
- Always install with pressure against the seat.


COMP X MALE PIPE



MAF #	REF #	COMP X MALE PIPE	IND. #	A	B	APPROX. WT. LBS.	LIST
133C	46001	3/16" x 1/8"					76.32
101C	46002	1/4" x 1/8"	M-101-C	1.29	1.12	0.07	25.59
1101C	46003	1/4" x 1/4"	M-101-C	1.27	1.14	0.10	14.08
102C	46004	5/16" x 1/8"					60.70
143C	46005	3/8" x 1/4"					20.21

NV106C 2205 820 3068


COMP X MALE PIPE-ANGLE



MAF #	REF #	COMP X MALE PIPE	HANDLE	IND. #	A	B	C	APPROX. WT. LBS.	LIST
103C	46011	1/4" x 1/8"	A	M-103-C	0.56	1.48	0.93	0.08	19.06
103CFH	46011X	Heavy Pattern	B	M-103-C	0.53	1.53	0.83	0.08	24.83
103CHV		1/4" x 1/8"							10.19
104C	46012	1/4" x 1/4"	B	M-104-C	0.62	1.67	0.90	0.13	20.37
203C	46013	5/16" x 1/8"	B	M-104-C	0.63	1.63	0.95	0.10	23.94
204C		5/16" x 1/4"							59.12
303C		3/8" x 1/4"							22.23
302C		3/8" x 1/8"							

NV104C 2203 821 3069


COMP X COMP



MAF #	REF #	COMP X COMP	HANDLE	IND. #	A	B	APPROX. WT. LBS.	LIST
105C	46020	3/16"	B	M-105-C	1.06	0.88	0.08	107.49
106C	46021	1/4"	A	M-106-C	1.17	1.12	0.10	8.74
107C	46022	5/16"	A	M-107-C	1.22	1.08	0.12	31.37
113C	46023	3/8"	B	M-113-C	1.31	1.15	0.13	15.52

NV105C 3062 2201 822

FLARE X MALE PIPE



MAF #	REF #	MALE FLARE X MALE PIPE	HANDLE	IND. #	A	B	APPROX. WT. LBS.	LIST
104SAE	46028	1/4" x 1/8"	A	M-104-SAE	1.35	1.12	0.07	24.17
1104SAE	46029	1/4" x 1/4"	B	M-1040-SAE	1.38	0.88	0.09	23.85
106SAE		5/16" x 1/8"						47.46
108SAE	46031	3/8" x 1/4"	B	M-108-SAE	1.73	1.22	0.18	109.39

NV103F 2405 823 3048

WARNING: This product can expose you to chemicals, including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, visit www.P65Warnings.ca.gov




NEEDLE VALVES

BRASS FITTINGS

MADE IN THE USA


FLARE X MALE PIPE - ANGLE



MAF #	REF #	MALE FLARE X MALE PIPE	IND. #	A	B	C	APPROX. WT. LBS.	LIST
103SAE	46036	1/4" x 1/8"	M-103-SAE	0.68	1.54	0.86	0.08	18.43
203SAE		5/16" x 1/8"						55.64
204SAE	46039	5/16" x 1/4"	M-204-SAE	0.90	1.94	1.00	0.14	24.17
303SAE	46040	3/8" x 1/4"	M-303-SAE	0.95	1.86	0.90	0.17	22.42

NV101F 2403 824 3049


FLARE X FLARE



MAF #	REF #	MALE FLARE X MALE FLARE	IND. #	A	B	APPROX. WT. LBS.	LIST
110SAE	46045	1/4"	M-110-SAE	1.48	1.20	0.18	11.00
115SAE	46046	3/8"	M-115-SAE	1.79	1.19	0.20	28.61

NV102F 3042 825 2401


MULTI-PURPOSE AIR VENT



MAF #	REF #	MALE PIPE	A	HEX	APPROX. WT. LBS.	LIST
AV-2S	46048	1/8"	0.78	0.43	0.02	4.74

705


MALE PIPE TO MALE PIPE



MAF #	REF #	MALE PIPE X MALE PIPE	HANDLE	IND. #	A	B	APPROX. WT. LBS.	LIST
108P	46050	1/8"	A	M-108-P	1.25	1.09	0.08	29.21
108PFH		1/8"						72.84
110P	46051	1/4"	B	M-110-P	1.69	1.00	0.16	21.94
202P		3/8"						15.89

NV107P 2301 826 3122

FEMALE PIPE X FEMALE PIPE




MAF #	REF #	FEMALE PIPE X FEMALE PIPE	IND. #	A	B	APPROX. WT. LBS.	LIST
304P	46055*	1/8"	M-304-P	1.18	0.84	0.18	23.01
3044PFH	46056P*	1/4" Heavy	M-3044-P	1.62	2.53	0.20	18.79

* Pressed on handle

6800 NV109P 2304 817 3103

MALE X FEMALE PIPE



NBR seals -30°C to 120°C

MAF #	REF #	MALE PIPE X FEMALE PIPE	HANDLE	IND. #	A	B	APPROX. WT. LBS.	LIST
305P	46060	1/8"	A	M-305-P	1.18	1.09	0.10	9.74
3055P	46061	1/4"	A	M-3055-P	1.60	1.14	0.18	...
3055PFH	46061L	1/4" Light Pattern	B	M-3055-P	1.88	1.09	0.21	46.65

NV108P 2305 818 3120

WARNING: This product can expose you to chemicals, including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, visit www.P65Warnings.ca.gov

MID-AMERICA FITTINGS

D.O.T. AIR BRAKE-HOSES/ ENDS

BRASS FITTINGS

MADE IN THE USA

BRASS TRUCK VALVES

- Used in heavy duty truck, trailer and mobile markets.
- Used on water, oil and coolant lines.
- Forged brass construction with steel handle.
- Temperature range -40° - 250°
- Max pressure 250 psi
- Metal to metal seats for high heat/fluid compatibility
- Fine thread screw down to afford flow control ability and a positive seal.
- Not intended for natural gas, LPG, Nuclear or aircraft applications

BARB TO MALE PIPE



200 PSI

TV44

MAF #	REF #	SIZE	LIST
TV44-66	46450	3/8 x 3/8	15.81
TV44PH-66*		3/8" x 3/8"	22.22
TV44-86		1/2" x 3/8"	32.26
TV44-106	46451	5/8 x 3/8	17.91
TV44PH-106*		5/8" x 3/8"	34.33
TV44-108	46455	5/8 x 1/2	38.17
TV44-126	46457	3/4 x 3/8	50.43
TV44-128	46456	3/4 x 1/2	40.20

* Pin handle

404V

FEMALE TO MALE PIPE



TV45

MAF #	REF #	SIZE	LIST
TV45-66	46465	3/8 x 3/8	28.39
TV45-68	46466	3/8 x 1/2	31.85
TV45-88	46467	1/2 x 1/2	34.10

405V

FLARE TO MALE PIPE BRASS TRUCK VALVE



MAF #	REF #	SIZE	LIST
TV49-64		3/8" x 1/4"	28.52
TV49-66		3/8" x 3/8"	29.86
TV49-68		3/8" x 1/2"	35.29
TV49-86		1/2" x 3/8"	34.60
TV49-88	46475	1/2" x 1/2"	71.10
TV49-108	46476	5/8" x 1/2"	32.08
TV412-108*	46485	5/8" x 1/2"	33.71

* Male pipe x Flare

NYLON AIR BRAKE X MIP

MAF #	REF #	SIZE	LIST
TV48NA-88		1/2" x 1/2"	44.64
TV410NA-88*		1/2" x 1/2"	35.98

* MIP x NAB

WARNING: This product can expose you to chemicals, including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, visit www.P65Warnings.ca.gov

SOLID BOTTOM FUEL VALVES

- Approved for use on Motorcraft fuel lines.
- Pointer lever.
- 90° turn stop mechanism to assure positive location of the on and off positions.

- Corrosion proofed internal construction assures maximum salt atmosphere protection.
- Port hole is 1/4 (.250) diameter.
- UL listed for use in fuel oils no. 1 & no. 2, LP gas and utility gas.

O-RING SEALED MALE X FEMALE

MAF #	REF #	SIZE	LIST
170C-2	46400	1/8"	29.66
170C-4	46401	1/4"	27.18
170C-6	46402	3/8"	30.04

PIPE MALE X FEMALE - MARINE FUEL



MAF #	REF #	SIZE	LIST
M670C-2	46400M	1/8 x 1/8	49.97
M670C-4	46401M	1/4 x 1/4	40.21
M670C-6	46402M	3/8 x 3/8	43.89

8980

PIPE MALE X MALE - MARINE FUEL VALVE



MAF #	REF #	SIZE	LIST
M671C-4	46406M	1/4 x 1/4	45.67

8990

- Good for Propane

PIPE FEMALE X FEMALE



MAF #	REF #	SIZE	LIST
M672C-4*	46411M	1/4 x 1/4	44.49
172C-4	46411		32.22

* Marine fuel valve

8975

MALE PIPE X FLARE - MARINE FUEL VALVE



MAF #	REF #	SIZE	LIST
M675C-64	46429M	1/4 x 3/8	41.66
M675C-66	46430M	3/8 x 3/8	67.34

8948

WARNING: This product can expose you to chemicals, including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, visit www.P65Warnings.ca.gov

D.O.T. AIR BRAKE-HOSES/ ENDS



BRASS FITTINGS

MADE IN THE USA

GROUND PLUG SHUT-OFF COCKS

NON-LUBRICATED PLUG VALVES are designed to operate in systems where INSTANTANEOUS PORT SELECTION is desired. Since LUBRICANTS ARE NOT USED, relubrication is not required. There is no lubricant to freeze and lock the valve or to contaminate fine fluids. The O-RING SEALED CAP and STEM eliminate leakage to atmosphere. The mating BRASS BODY and CELCON PLUG produce a fine seal that WILL NOT SEIZE OR GALL.

Designed for PANEL or BRACKET MOUNTING. They are generally recommended for operation in GASOLINE, OIL, AIR, WATER and DETERGENT systems from minus 40° to 180°F, at a maximum operating pressure of 30 p.s.i.g. The fluid port size is 9/32 (.281) diameter for 1/8 and 1/4 sizes, 5/16 (.312) diameter for the 3/8 size. **(Consult factory for applications requiring a higher pressure).**

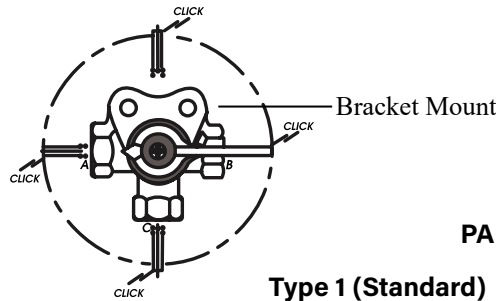


PANEL MOUNTING AVAILABLE

Type 1 (Standard)

A pronounced "click" may be felt at each position.
Handle travel is not restricted.

THREE-WAY VALVES (SIDE OUTLET)



- 1-3/8" Stem
- Side Outlet
- Bracket Mounting
- O-Ring Sealed
- 4-way celcon roter standard

M-108-MID WITH CLICK 360°

MAF #	REF #	A-B-C FEMALE PIPE THREAD	LENGTH OF STEM	LIST
210C-2	46250	1/8	1-3/8"	39.68
210C-4	46251	1/4	1-3/8"	38.78
210C-6	46252	3/8	1-3/8"	45.63

Openings:

Handle Pointer over A.....Valve Open A-C
 Handle Pointer over C.....Valve Open B-C
 Handle Pointer over B.....Valve "OFF"
 Handle Pointer over Bracket.....Valve "OFF"

V406P 6749


WARNING: This product can expose you to chemicals, including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, visit www.P65Warnings.ca.gov

SPECIALTY VALVES

BRASS FITTINGS

MADE IN THE USA

THREE-WAY VALVES (BOTTOM OUTLET)



- 1-3/8" Stem
- Side Outlet
- Bracket Mounting
- O-Ring Sealed
- 4-way celcon roter standard

LESS CLICK

MAF #	REF #	A-B-C FEMALE PIPE THREAD	LENGTH OF STEM	LIST
120C-4	46241	1/4	1-3/8"	39.74

WITH CLICK 360°

MAF #	REF #	A-B-C FEMALE PIPE THREAD	LENGTH OF STEM	LIST
220C-2	46243	1/8	1-3/8"	46.25
220C-4	46244	1/4	1-3/8"	41.56


Openings:

Handle Pointer over A.....Valve Open A-C

Handle Pointer over B.....Valve Open B-C

Handle Pointer over Bracket.....Valve "OFF"

FOUR-WAY VALVES



- Side Outlet
- Bracket Mounting
- O-Ring Sealed
- 4-way celcon roter standard

LESS CLICK

MAF #	REF #	A-B-C FEMALE PIPE THREAD	LENGTH OF STEM	LIST
220C-4LC	46257	1/4	1-3/8"	...

M-114-MID WITH CLICK (360°)

MAF #	REF #	A-B-C FEMALE PIPE THREAD	LENGTH OF STEM	LIST
200C-4	46255	1/4	1-3/8"	42.15
200C-6	46256	3/8	1-3/8"	50.31

WITH 2-3/8" LONG STEM M-115-MID

MAF #	REF #	A-B-C FEMALE PIPE THREAD	LENGTH OF STEM	LIST
215C-4	46260	1/4	2-3/8"	42.60
215C-6		3/8		49.61

Openings:

Handle Pointer over A.....Valve Open A-D

Handle Pointer over C.....Valve Open C-D

Handle Pointer over B.....Valve Open B-D

Handle Pointer over Bracket.....Valve "OFF"

WARNING: This product can expose you to chemicals, including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, visit www.P65Warnings.ca.gov

MID-AMERICA FITTINGS

SPECIALTY VALVES

BRASS FITTINGS

MADE IN THE USA

BRASS MINIATURE BALL VALVES

- Working Pressure up to 1000 P.S.I.G.
- ASTM B-16 Corrosion Resistant Brass Body.
- Non-Adjusting Viton O-Ring Stem Seal Design Never Needs Tightening.
- Highly Inert Teflon Seats.
- Long Life Nickel Plated Brass Ball.
- Blow-Out Proof Stem for Safety.
- Temperature: -40°F to 300°F
- 1/4 Turn Instantaneous On-Off Operation.
- Quarter Turn Handle Design.
- Water, Oil, and Air Pressure Systems.
- Ideal for tight, confined areas, or when routing aesthetics are desired. Applications include instrumentation, gas sampling systems, high pressure gauges, test stands, hydraulic and pneumatic service lines on capital equipment.
- Not good for steam.
- Good for propane, gas and diesel.

MALE X FEMALE

MAF #	REF #	SIZE	LIST
350BV-22	46900	1/8 x 1/8	30.46
350BV-44	46903	1/4 x 1/4	30.43

MALE X MALE

MAF #	REF #	SIZE	LIST
351BV-22	46910	1/8 x 1/8	33.73
351BV-44	46912	1/4 x 1/4	32.92

MALE PIPE X HOSE BARB

MAF #	REF #	SIZE	LIST
357BV-42	47042	1/8 x 1/4	41.07
357BV-44	46980	1/4 x 1/4	30.71
357BV-46	46981	1/4 x 3/8	...
357BV-54		5/16" x 1/4"	29.06
357BV-64		3/8" x 1/4"	28.78
357BV-66		3/8" x 3/8"	29.06
357BV-88		1/2" x 1/2"	35.66

WARNING: This product can expose you to chemicals, including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, visit www.P65Warnings.ca.gov

