






MIDLAND INDUSTRIES



- Resilient Wedge
- Anti-Clockwise close
- UL Listed / FM Approved
- Flanges Conform to ANSI B16.1
- Mechanical joint outlet complies with ANSI C153

SIZE	L	H	D _o
3"	8.8	11.0	10.0
4"	9.5	11.8	10.0
6"	11.0	16.4	12.0
8"	12.0	20.7	14.0
10"	13.9	24.5	16.0
12"	14.5	28.0	16.0

Item	Description	Material	ASTM Spec.
1	Body	Ductile Iron	A536 65-45-12
2	Disc	Ductile Iron NBR Encapsulated	A536 65-45-12
3	Stem Nut	Bronze	B148 C95200
4	Stem	Stainless Steel	A276 Type 304SS
5	Gasket	Rubber	D2000 NBR
6	Bolt	Stainless Steel	F593 Type 304SS
7	Bonnet	Ductile Iron	A536 65-45-12
8	O-Ring	Rubber	D2000 NBR
9	Thrust Collar	Bronze	B148 C95200
10	O-Ring	Rubber	D2000 NBR
11	Gland	Ductile Iron	A536 65-45-12
12	O-Ring	Rubber	D2000 NBR
13	Dust Ring	Rubber	D2000 NBR
14	Operating Nut(Optional)	Ductile Iron	A536 65-45-12
15	Bolts	Stainless Steel	F593 Type 304SS
16	Washer	Stainless Steel	A276 Type 304SS
17	Handwheel(Optional)	Ductile Iron	A536 65-45-12
18	Bolts	Stainless Steel	F593 Type 304SS

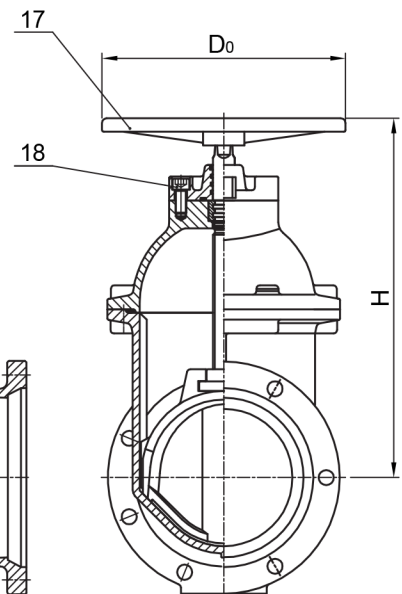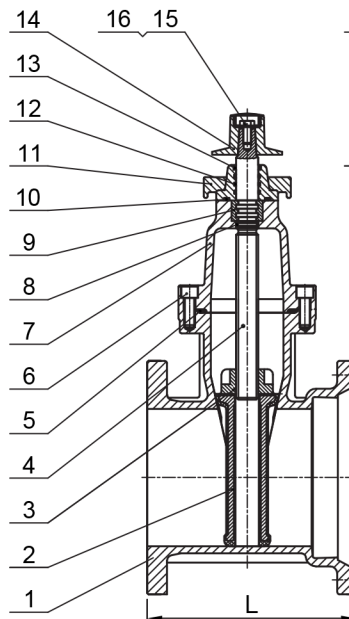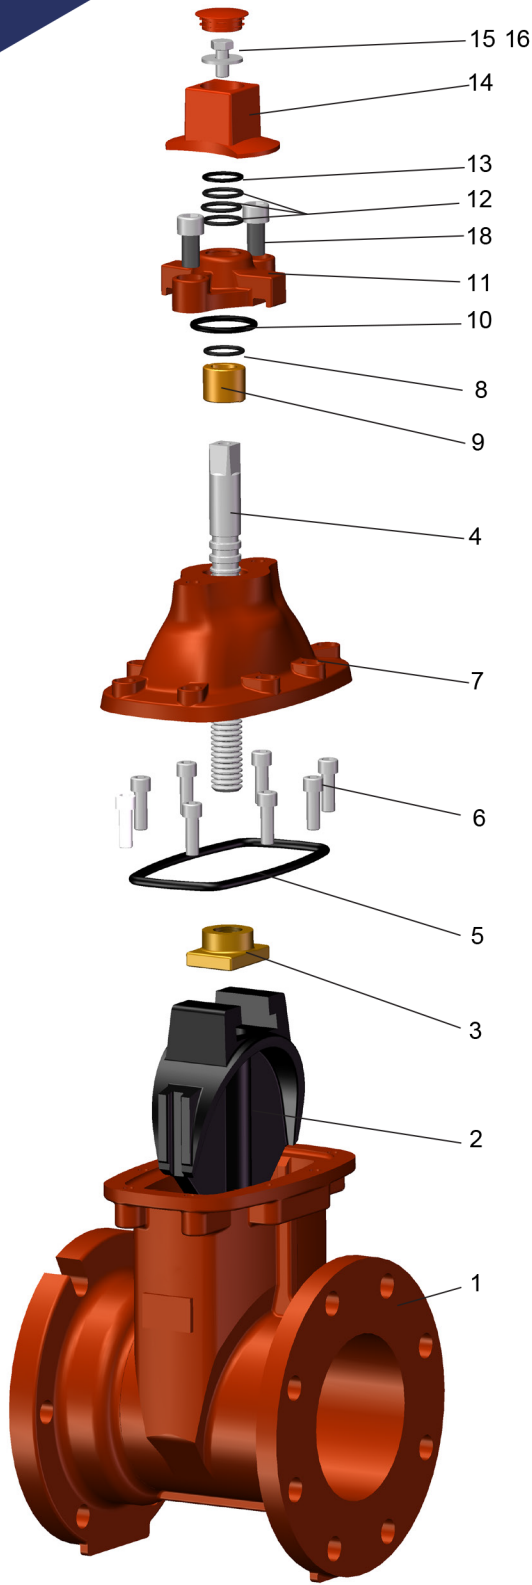

AWWA C515-NRS RESILIENT SEATED GATE VALVE-FLx MJ ENDS

F0213-300

CALL US
PHONE: 800-821-5725

VISIT US
MIDLANDINDUSTRIES.COM

3145 OAK ST,
KANSAS CITY, MO 64111

FIND US ON: