



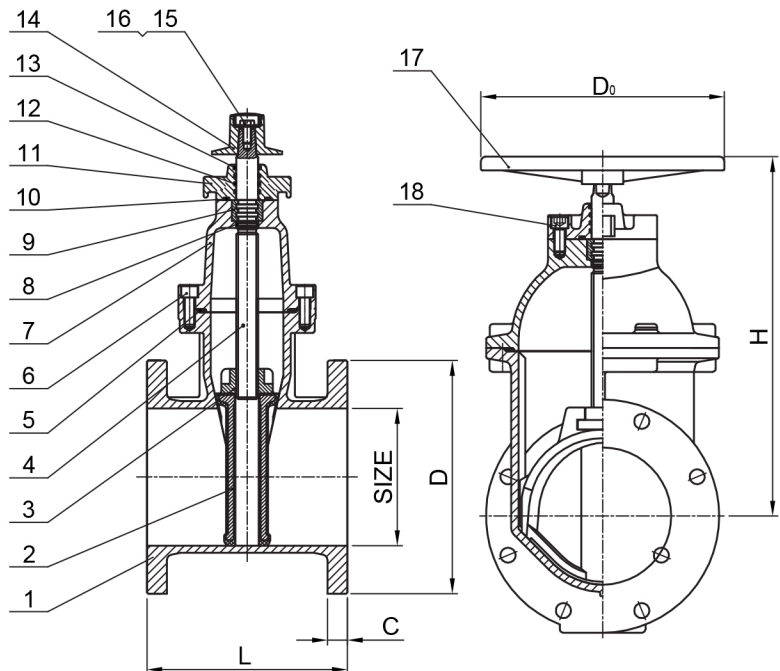

WATER QUALITY
Drinking Water System Component
ANSI / NSF 61 & 372
MH61025

SIZE	L	H	D
2"	7.0	9.5	6.0
2.5"	7.5	10.0	7.0
3"	8.0	11.0	7.5
4"	9.0	11.8	9.0
6"	10.5	16.4	11.0
8"	11.5	20.7	13.5
10"	13.0	24.5	16.0
12"	14.0	28.0	19.0
14"	15.0	32.9	22.0
16"	16.0	35.8	22.0
18"	17.0	41.3	24.0

Item	Description	Material	ASTM Spec.
1	Body	Ductile Iron	A536 65-45-12
2	Disc	Ductile Iron - NBR Encapsulated	A536 65-45-12
3	Stem Nut	Bronze	ASTM C95200
4	Stem	Stainless Steel	AISI AISI 304
5	Gasket	Rubber	NBR
6	Bolt	Stainless Steel	A2-70
7	Bonnet	Ductile Iron	A536 65-45-12
8	O-Ring	Rubber	NBR
9	Thrust Collar	Bronze	ASTM C95200
10	O-Ring	Rubber	NBR
11	Gland	Ductile Iron	A536 65-45-12
12	O-Ring	Rubber	NBR
13	Dust Ring	Rubber	NBR
14	Operating Nut(Optional)	Ductile Iron	A536 65-45-12
15	Bolts	Stainless Steel	A2-70
16	Washer	Stainless Steel	SS304
17	Handwheel(Optional)	Ductile Iron	A536 65-45-12
18	Bolts	Stainless Steel	A2-70

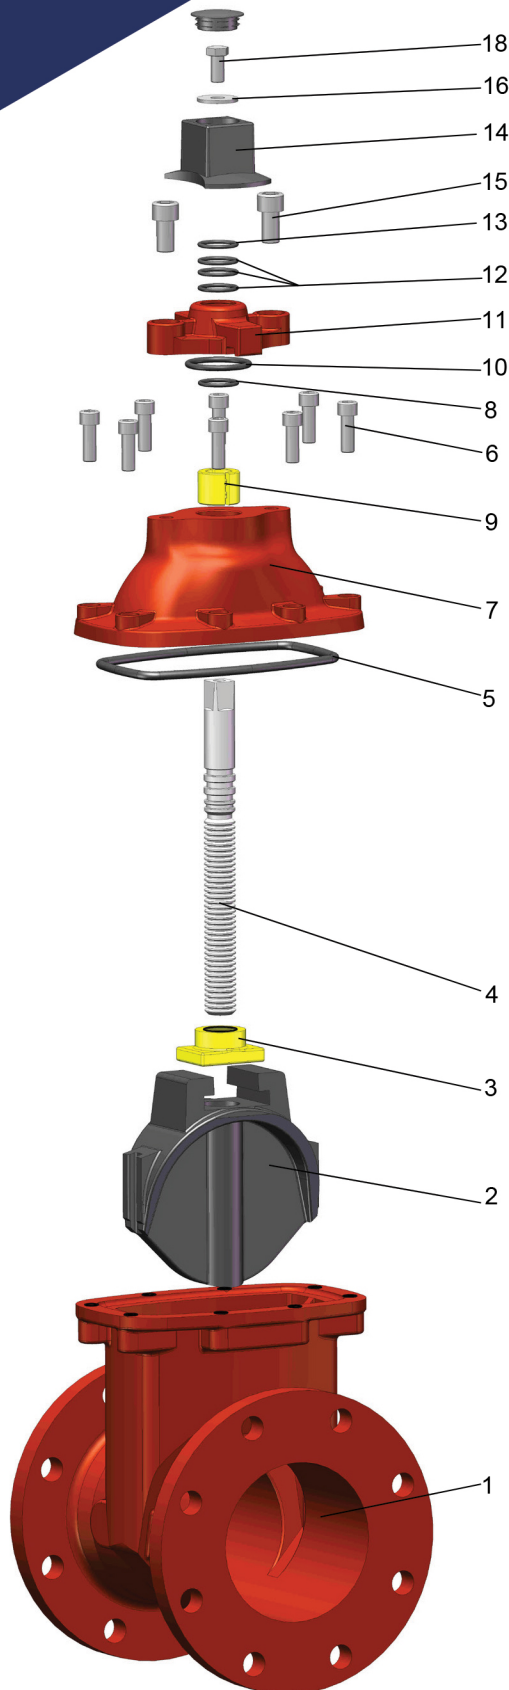

AWWA C515-NRS RESILIENT SEATED GATE VALVE-FLANGED ENDS

F0211-300

CALL US

PHONE: 800-821-5725

VISIT US

MIDLANDINDUSTRIES.COM

3145 OAK ST,

KANSAS CITY, MO 64111

FIND US ON: f in